


Parametrika 1.2

Tutorial

Viktorija Tamulienė

January 25, 2024

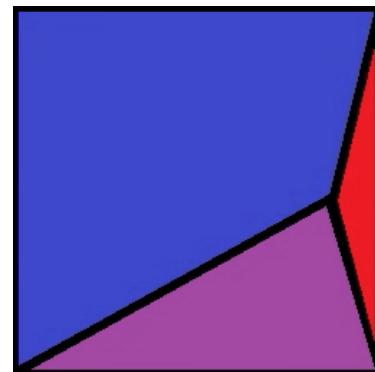

Contents

1	Overview	4
2	Module <i>Bulk Crystals</i>	6
2.1	Module <i>Down-conversion</i>	6
2.1.1	Three interacting waves	6
2.1.2	Choose wavelengths	7
2.1.3	Nonlinear crystals	8
2.1.4	Interaction type	11
2.1.5	Interaction plane	12
2.1.6	Geometry	13
2.1.7	Calculate noncollinear interaction	14
2.1.8	3D visualization	17
2.1.9	Dispersion parameters	18
2.1.10	Bandwidth estimation window	19
2.2	Module <i>Up-conversion</i>	21
2.2.1	Three interacting waves	21
2.2.2	Choose wavelengths	22
2.2.3	Nonlinear crystals	23
2.2.4	Interaction type	26

2.2.5	Interaction plane	27
2.2.6	Geometry	28
2.2.7	Calculate the noncollinear interaction	29
2.2.8	3D visualization	31
2.2.9	Dispersion parameters	32
3	Module <i>PP Crystals</i>	33
3.1	Module <i>Down-conversion</i>	33
3.1.1	Three interacting waves	33
3.1.2	Nonlinear crystals	34
3.1.3	Interaction type	35
3.1.4	Pump wavelength and temperature	37
3.1.5	Signal wavelength and lattice period	38
3.1.6	Graph	39
3.1.7	Output data	40
3.2	Module Up-conversion	41
3.2.1	Three interacting waves	41
3.2.2	Nonlinear crystals	42
3.2.3	Interaction type	43
3.2.4	Pump wavelengths	45
3.2.5	Output	46
4	What's inside? Formulas	47
4.1	Bulk crystals. Down-conversion	47
4.1.1	Notations	47
4.1.2	Phase-matching	47
4.1.3	Gain band	56
4.2	Bulk crystals. Up-conversion	57
4.2.1	Notations	57
4.2.2	Phase-matching	57
4.3	PP crystals.	63

4.3.1	Equations	63
4.3.2	Notations. Down-conversion	63
4.3.3	Quasi-phasematching. Down-conversion	63
4.3.4	Notations. Up-conversion	63
4.3.5	Quasi-phasematching. Up-conversion	63
4.3.6	Interaction types	64
4.4	Dispersion parameters	64
5	Edit crystals' database	65
6	Financial Support	68

1 OVERVIEW

1 Overview

The program Parametrika 1.2 was released in 2024. It was written with Python 3.7 using Kivy (<https://kivy.org/>).

The window of the main Program is presented in Fig. 1. The main windows of the modules *Bulk Crystals* and *PP Crystals* are presented in Figs. 2 and 3, respectively. In both modules, one can choose either *Up-conversion* or *Down-conversion* modules. The crystals' database can be edited by pressing *Edit Database*.

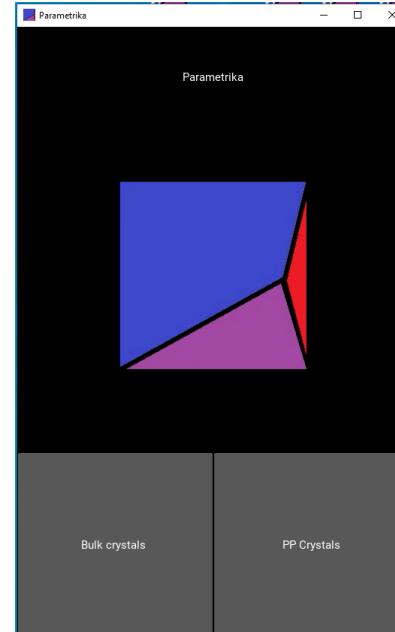


Figure 1: The main window.

1 OVERVIEW

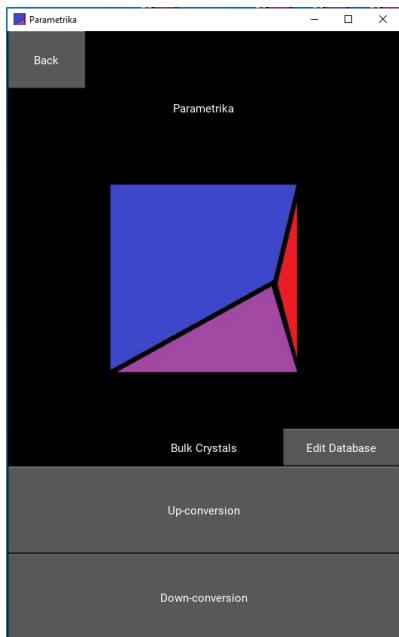


Figure 2: Window of the module *Bulk Crystals*.

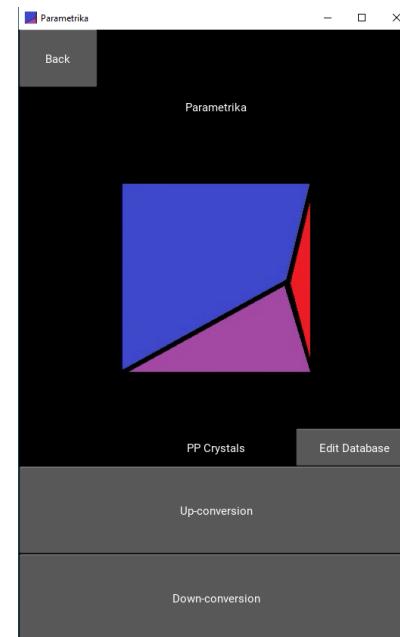


Figure 3: Window of the module *PP Crystals*.

2 Module Bulk Crystals

2.1 Module Down-conversion

2.1.1 Three interacting waves

The phase-matching for optical parametric down-conversion is calculated. Three interacting waves, their angular frequencies and wavelengths:

- *Signal*: ω_1, λ_1 .
- *Idler*: ω_2, λ_2 .
- *Pump*: ω_3, λ_3 .

Conservation law of the photon energy (Fig. 4):

$$\hbar\omega_3 = \hbar\omega_1 + \hbar\omega_2, \quad (1)$$

where \hbar is the reduced Plank constant. $\omega = 2\pi c/\lambda$, where c is speed of light. Therefore:

$$\frac{1}{\lambda_3} = \frac{1}{\lambda_1} + \frac{1}{\lambda_2}. \quad (2)$$

Phase-matching schemes for the collinear as well as noncollinear interaction types are presented in Fig. 5.

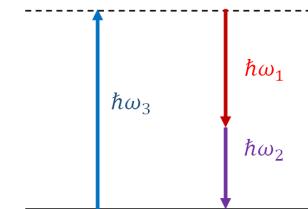


Figure 4: Scheme of photon energies in the optical parametric down-conversion.

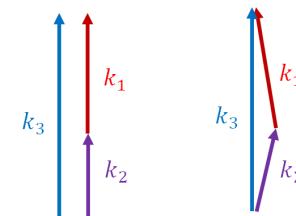


Figure 5: Collinear (left) and noncollinear (right) phase-matching schemes. \mathbf{k}_1 , \mathbf{k}_2 and \mathbf{k}_3 are the wavevectors of signal, idler and pump waves, respectively.

2.1.2 Choose wavelengths

First, write the wavelengths values in nanometers for signal and pump waves, Fig. 6. Press *Enter*. Idler wavelength is calculated by the use of Eq. (2).

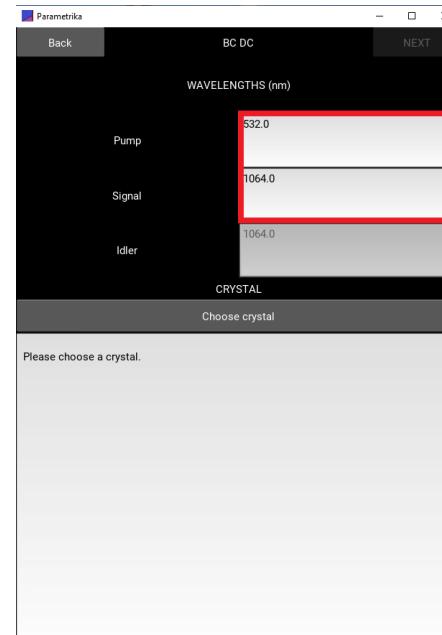


Figure 6: Input wavelengths menu.

2.1.3 Nonlinear crystals

Choose a crystal from a list (Fig. 7).

List of nonlinear crystals [1]:

- *ADP*, Ammonium Dihydrogen Phosphate (uniaxial).
- *AGS*, Silver Thiogallate (uniaxial).
- *AGSe*, Silver Gallium Selenide (uniaxial).
- *BABF*, Barium Aluminum Fluoroborate (uniaxial). (d_{11} and d_{22} values from [2].)
- *BBO*, Beta-Barium Borate (uniaxial). (Sellmeier equations from [3].)
- *BIBO*, Bismuth Triborate (biaxial). (Equal values of d_{eff})
- *BNN*, Barium Sodium Niobate (biaxial).
- *CBO*, Cesium Triborate (biaxial).
- *CDA*, Cesium Dihydrogen Arsenate (uniaxial).
- *CGA*, Cadmium Germanium Arsenide (uniaxial).
- *CLBO*, Cesium Lithium Borate (uniaxial).
- *CMTC*, Cadmium Mercury Thiocyanate (uniaxial).
- *CTA*, Cesium Titanyl Arsenate (biaxial).
- *CdSe*, Cadmium Selenide (uniaxial).
- *DCDA*, Deuterated Cesium Dihydrogen Arsenate (uniaxial).

- *DKDP*, Deuterated Potassium Dihydrogen Phosphate (uniaxial).
- *DLAP*, Deuterated *L*-Arginine Phosphate Monohydrate (biaxial).
- *GaSe*, Gallium Selenide (uniaxial).
- *GdCOB*, Gadolinium Calcium Oxyborate (biaxial).
- *KABO*, Potassium Aluminum Borate (uniaxial).
- *KB5*, Potassium Pentaborate Tetrahydrate (biaxial). (Sellmeier equations from [4].)
- *KBBF*, Potassium Fluoroboratoberyllate (uniaxial).
- *KDP*, Potassium Dihydrogen Phosphate (uniaxial).
- *KLN*, Potassium Lithium Niobate (uniaxial).
- *KTA*, Potassium Titanyl Arsenate (biaxial).
- *KTP*, Potassium Titanyl Phosphate (biaxial).
- *LB4*, Lithium Tetraborate (uniaxial).
- *LBO*, lithium triborate (biaxial).
- *LFM*, Lithium Formate Monohydrate (biaxial).
- *LGS*, Lithium Thiogallate (biaxial). (d_{31} and d_{32} values from [5].)
- *LGSe*, Lithium Gallium Selenide (biaxial). (d_{31} and d_{32} values from [5].)
- *LIS*, Lithium Thioindate (biaxial). (Sellmeier equations from [6].)

- *LISe*, Lithium Indium Selenide (biaxial). (Sellmeier equations from [6].)
- *LN*, Lithium Niobate (uniaxial).
- *LRB4*, Lithium Rubidium Tetraborate (biaxial).
- *LiIO₃*, Lithium Iodate (uniaxial).
- *MgLN*, Magnesium-Oxide–Doped Lithium Niobate (uniaxial). (In [1], n_o should be replaced by n_e and vice versa.)
- *NbKTP*, Niobium-Doped KTP (biaxial).
- *Proustite*, Proustite (uniaxial).
- *RDP*, Rubidium Dihydrogen Phosphate (uniaxial).
- *RTP*, Rubidium Titanyl Phosphate (biaxial).
- *TAS*, Thallium Arsenic Selenide (uniaxial).
- *Urea*, Urea (uniaxial).
- *YCOB*, Yttrium Calcium Oxyborate (biaxial).
- *ZGP*, Zinc Germanium Phosphide (uniaxial).
- *aHIO₃*, α -Iodic Acid (biaxial).

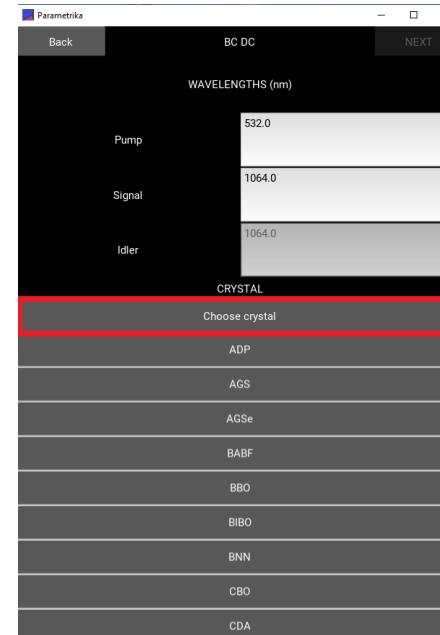


Figure 7: Select crystal drop-down menu.

The collinear interaction will be calculated.

Then, press *NEXT* in order to see the window of noncollinear interaction (Fig. 8).

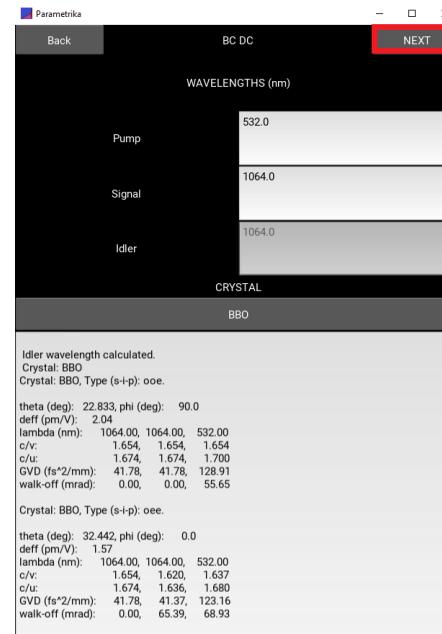


Figure 8: Press *NEXT*.

2.1.4 Interaction type

In the interaction type, the notations are in the following order: signal-idler-pump, e.g. *ooe* means that signal and idler waves are ordinary waves and pump wave is extraordinary wave.

There are six possible interaction types:

- *ooe*
- *oee*
- *eoe*
- *eo*
- *eoo*
- *oeo*

Only possible interaction types will be available (Fig. 9).

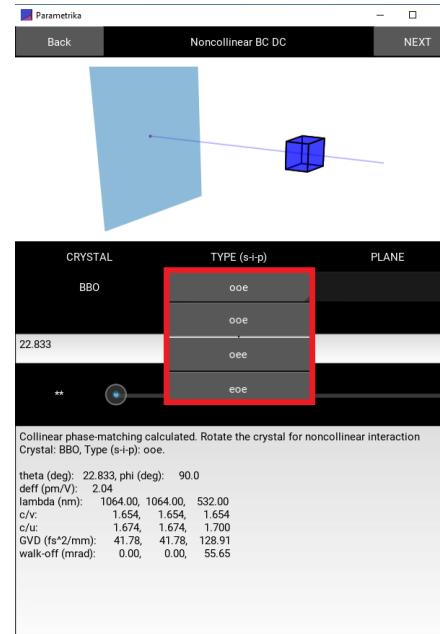


Figure 9: Select type drop-down menu.

2.1.5 Interaction plane

For biaxial crystals, the plane bar is activated. List of planes:

- XY
- XZ
- YZ

Only possible planes will be available (Fig. 10):

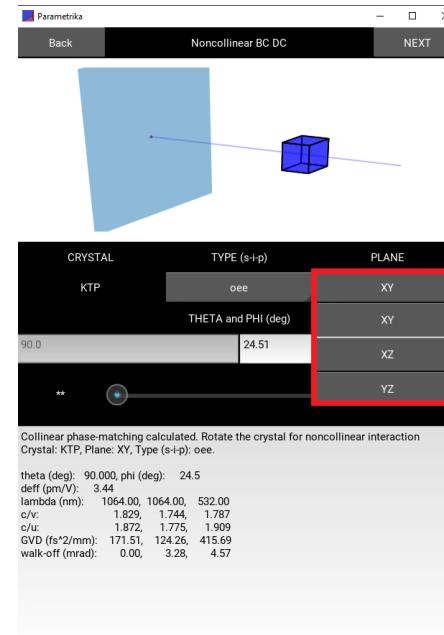


Figure 10: Select plane drop-down menu.

2.1.6 Geometry

The Euler angles θ and φ (*Theta* and *Phi*) are shown in Fig. 11. In the uniaxial crystal, z axis is the *optical axis*. Then, principal refractive indices $n_x = n_y = n_o$ and $n_z = n_e$.

In uniaxial crystals, all possible phase-matching angles are calculated. In biaxial crystals, the phase matching is calculated only in one chosen plane.

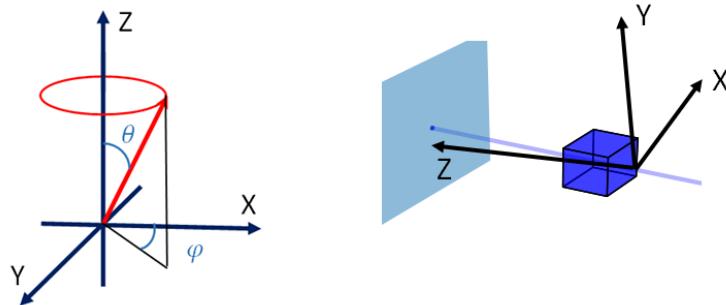


Figure 11: Left: Euler angles θ and φ (*Theta* and *Phi*) in the Cartesian coordinate system x , y , z . Right: coordinate system for uniaxial crystal.

2.1.7 Calculate noncollinear interaction

- To calculate the noncollinear interaction, either change the Euler angles in the Edit boxes or rotate the cube on the screen, Fig. 12.
- In the biaxial crystals, the rotation only in one plane is allowed.

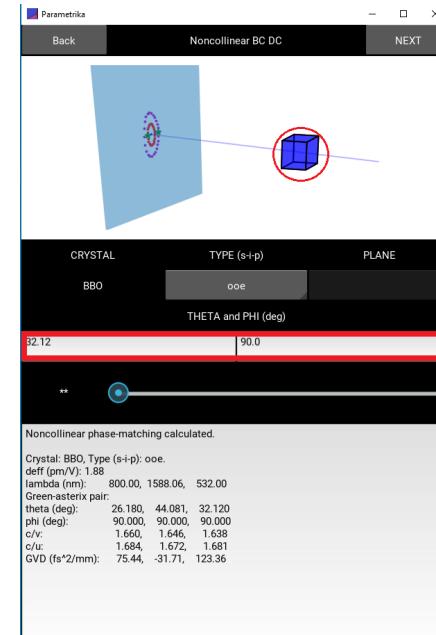


Figure 12: Rotate the cube.

- To change the pair of interacting signal and idler waves, move the slider.

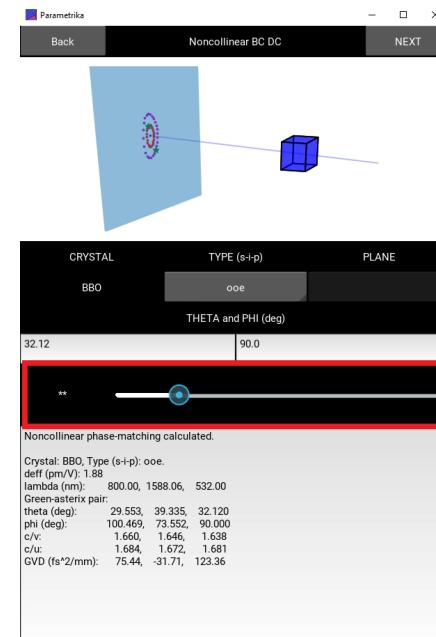


Figure 13: Move the slider.

- Dispersion parameters for all three interacting waves are shown in the output box 1 (Fig. 14).
- The crystal and output waves are visualized in the graphic box 2 (Fig. 14).

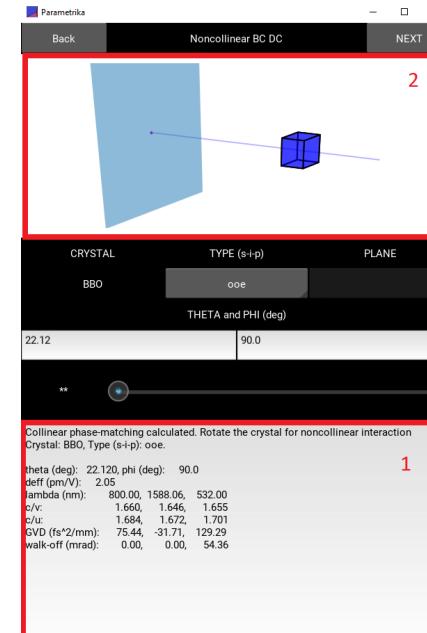


Figure 14: Visualization and information boxes.

2.1.8 3D visualization

- *Uniaxial crystal.* The crystal is cut with respect to the collinear phase-matching angle θ_p (Fig. 15a) and angle φ corresponds to the optimal d_{eff} . The signal and idler cones are visualized in the case of noncollinear phase-matching (Fig. 15b).
- *Biaxial crystal.* The chosen plane is horizontal and the crystal is cut with respect to the collinear phase matching angle. By varying the angle (either *Theta* or *Phi*) the noncollinear phase-matching is calculated (Fig. 15c). Rotation out of the plane is prohibited.

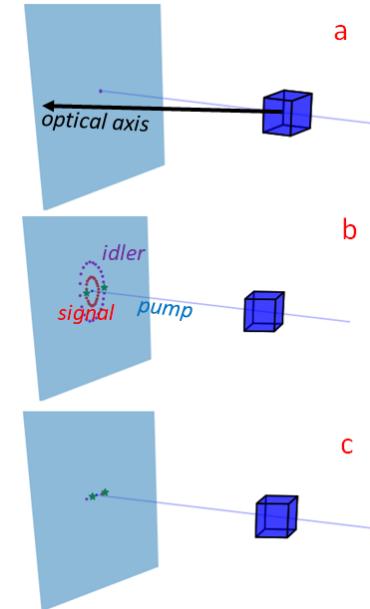


Figure 15: Visualization of (a) collinear phase-matching in uniaxial crystal; (b) noncollinear phase-matching in uniaxial crystal; (c) noncollinear phase-matching in biaxial crystal.

2.1.9 Dispersion parameters

The dispersion parameters are found by the use of the Sellmeier equations from [1].

List of the parameters (Fig. 16):

- c/v : refractive index.
- c/u : fraction of speed of light to the group velocity.
- GVD : group velocity dispersion coefficient.
- $walk-off$: the walk of angle.

The effective nonlinear susceptibility d_{eff} is found by the use of formulas given in [1]. This parameter is wavelength- and angle- dependent.

```
Noncollinear phase-matching calculated.
Crystal: BBO, Type (s-i-p): ooe.
deff (pm/V): 1.66
lambda (nm): 800.00, 1588.06, 532.00
Green-asterix pair:
theta (deg): 33.444, 59.703, 42.120
phi (deg): 90.000, 90.000, 90.000
c/v: 1.660, 1.646, 1.617
c/u: 1.684, 1.672, 1.658
GVD (fs^2/mm): 75.44, -31.71, 116.77
```

Figure 16: Dispersion parameters in the information box.

2.1.10 Bandwidth estimation window

- After successful calculations of collinear or noncollinear interaction, next window may be activated by pressing *NEXT* (Fig. 17) for bandwidth calculations.

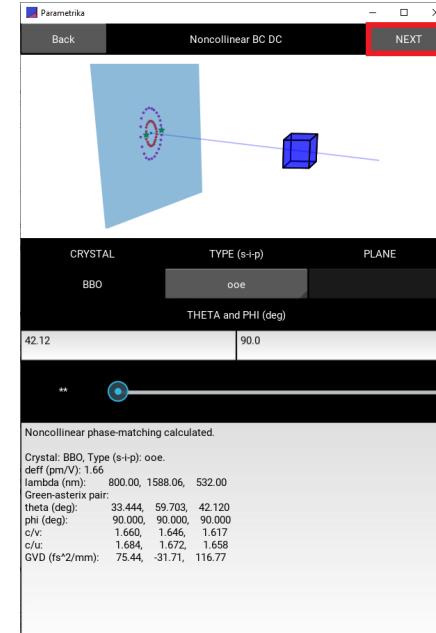


Figure 17: Press *NEXT* button.

- Choose input parameters (Fig. 18).
- The user may choose either *signal* or *idler* waves.
- The gain bandwidth at FWHM is calculated. See Section 4.1.3 for more details.
- Gain band is calculated and presented in a graphical box.
- The crystal information is given in the output box.
- To return, click *Back* button.
- To return to *Bulk crystals* module's main window, click *Main* button.

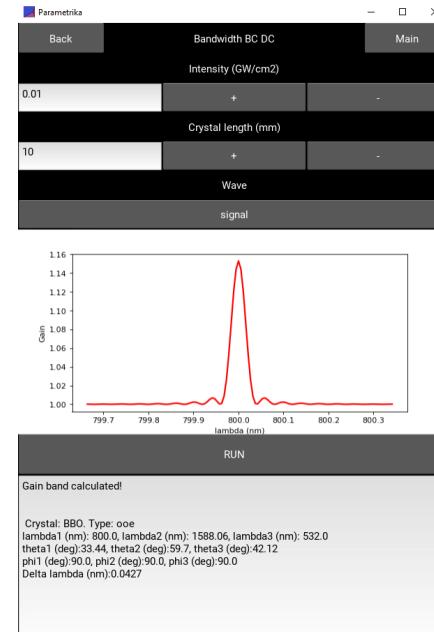


Figure 18: Bandwidth calculation window.

2.2 Module Up-conversion

2.2.1 Three interacting waves

The phase-matching for optical parametric up-conversion is calculated. Three interacting waves, their angular frequencies and wavelengths:

- *Pump 1*: ω_1, λ_1 .
- *Pump 2*: ω_2, λ_2 .
- *Sum Frequency*: ω_3, λ_3 .

Conservation law of the photon energy (Fig. 19):

$$\hbar\omega_1 + \hbar\omega_2 = \hbar\omega_3, \quad (3)$$

where \hbar is the reduced Plank constant. $\omega = 2\pi c/\lambda$, where c is speed of light.

Therefore:

$$\frac{1}{\lambda_1} + \frac{1}{\lambda_2} = \frac{1}{\lambda_3}. \quad (4)$$

Phase-matching schemes for the collinear as well as noncollinear interaction types are presented in Fig. 20.

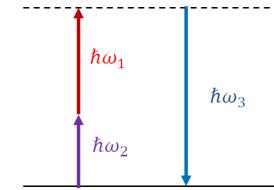


Figure 19: Scheme of photon energies in the optical parametric up-conversion.

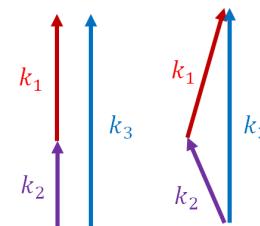


Figure 20: Collinear (left) and noncollinear (right) phase-matching schemes. $\mathbf{k}_1, \mathbf{k}_2$ and \mathbf{k}_3 are the wavevectors of pump 1, pump 2 and sum-frequency waves, respectively.

2.2.2 Choose wavelengths

First, write the wavelengths values in nanometers for the pump waves and press *ENTER*, Fig. 21. Sum frequency wavelength is calculated by the use of Eq. (4).

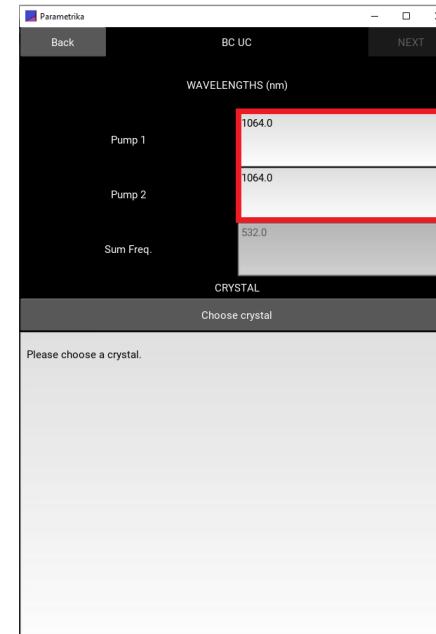


Figure 21: Input wavelengths menu.

2.2.3 Nonlinear crystals

Choose a crystal from a list (Fig. 22).

List of nonlinear crystals [1]:

- *ADP*, Ammonium Dihydrogen Phosphate (uniaxial).
- *AGS*, Silver Thiogallate (uniaxial).
- *AGSe*, Silver Gallium Selenide (uniaxial).
- *BABF*, Barium Aluminum Fluoroborate (uniaxial). (d_{11} and d_{22} values from [2].)
- *BBO*, Beta-Barium Borate (uniaxial). (Sellmeier equations from [3].)
- *BIBO*, Bismuth Triborate (biaxial). (Equal values of d_{eff})
- *BNN*, Barium Sodium Niobate (biaxial).
- *CBO*, Cesium Triborate (biaxial).
- *CDA*, Cesium Dihydrogen Arsenate (uniaxial).
- *CGA*, Cadmium Germanium Arsenide (uniaxial).
- *CLBO*, Cesium Lithium Borate (uniaxial).
- *CMTC*, Cadmium Mercury Thiocyanate (uniaxial).
- *CTA*, Cesium Titanyl Arsenate (biaxial).
- *CdSe*, Cadmium Selenide (uniaxial).
- *DCDA*, Deuterated Cesium Dihydrogen Arsenate (uniaxial).

- *DKDP*, Deuterated Potassium Dihydrogen Phosphate (uniaxial).
- *DLAP*, Deuterated *L*-Arginine Phosphate Monohydrate (biaxial).
- *GaSe*, Gallium Selenide (uniaxial).
- *GdCOB*, Gadolinium Calcium Oxyborate (biaxial).
- *KABO*, Potassium Aluminum Borate (uniaxial).
- *KB5*, Potassium Pentaborate Tetrahydrate (biaxial). (Sellmeier equations from [4].)
- *KBBF*, Potassium Fluoroboratoberyllate (uniaxial).
- *KDP*, Potassium Dihydrogen Phosphate (uniaxial).
- *KLN*, Potassium Lithium Niobate (uniaxial).
- *KTA*, Potassium Titanyl Arsenate (biaxial).
- *KTP*, Potassium Titanyl Phosphate (biaxial).
- *LB4*, Lithium Tetraborate (uniaxial).
- *LBO*, lithium triborate (biaxial).
- *LFM*, Lithium Formate Monohydrate (biaxial).
- *LGS*, Lithium Thiogallate (biaxial). (d_{31} and d_{32} values from [5].)
- *LGSe*, Lithium Gallium Selenide (biaxial). (d_{31} and d_{32} values from [5].)
- *LIS*, Lithium Thioindate (biaxial). (Sellmeier equations from [6].)

- *LISe*, Lithium Indium Selenide (biaxial). (Sellmeier equations from [6].)
- *LN*, Lithium Niobate (uniaxial).
- *LRB4*, Lithium Rubidium Tetraborate (biaxial).
- *LiIO₃*, Lithium Iodate (uniaxial).
- *MgLN*, Magnesium-Oxide–Doped Lithium Niobate (uniaxial). (In [1], n_o should be replaced by n_e and vice versa.)
- *NbKTP*, Niobium-Doped KTP (biaxial).
- *Proustite*, Proustite (uniaxial).
- *RDP*, Rubidium Dihydrogen Phosphate (uniaxial).
- *RTP*, Rubidium Titanyl Phosphate (biaxial).
- *TAS*, Thallium Arsenic Selenide (uniaxial).
- *Urea*, Urea (uniaxial).
- *YCOB*, Yttrium Calcium Oxyborate (biaxial).
- *ZGP*, Zinc Germanium Phosphide (uniaxial).
- *aHIO₃*, α -Iodic Acid (biaxial).

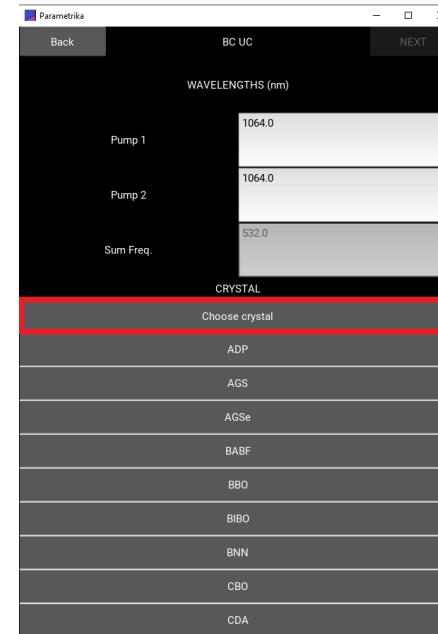


Figure 22: Select crystal drop-down menu.

The collinear interaction will be calculated.

Then, press *NEXT* in order to see the window of noncollinear interaction (Fig. 23).

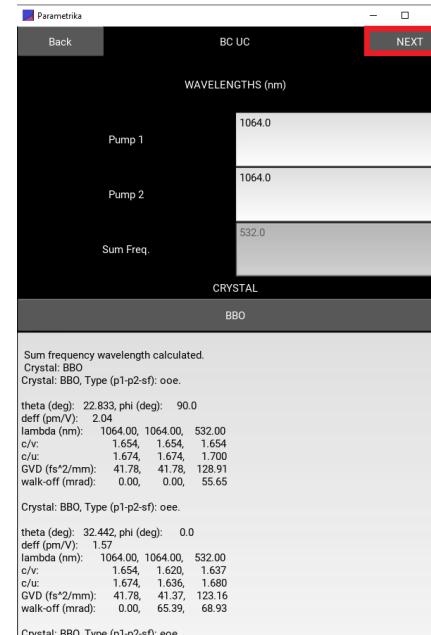


Figure 23: Press *NEXT*.

2.2.4 Interaction type

In the interaction type, the notations are in the following order: pump 1-pump 2-sum frequency, e.g. *ooe* means that both pump waves are ordinary waves and sum frequency wave is extraordinary wave.

There are six possible interaction types:

- *ooe*
- *oee*
- *eoe*
- *eoo*
- *eoo*
- *oeo*

Only possible interaction types will be available (Fig. 24).

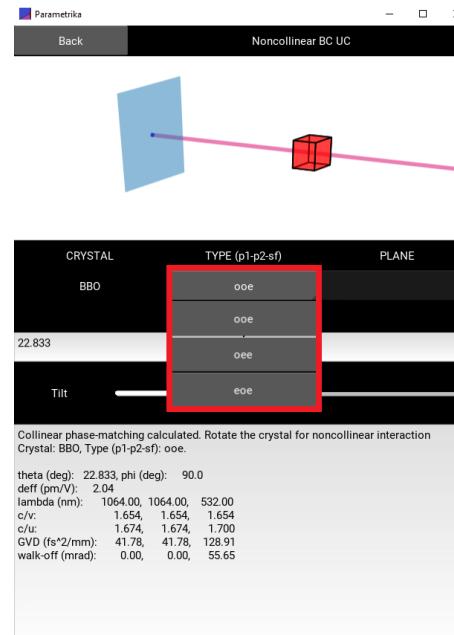


Figure 24: Select type drop-down menu.

2.2.5 Interaction plane

For biaxial crystals, the plane bar is activated. List of planes (Fig. 25):

- XY
- XZ
- YZ

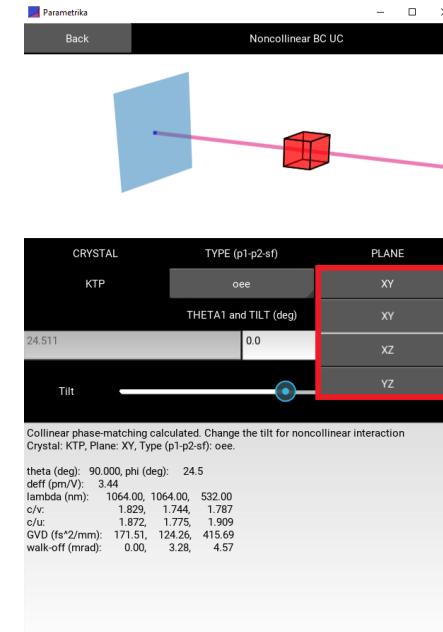


Figure 25: Select plane drop-down menu.

2.2.6 Geometry

The Euler angles θ and φ (*Theta* and *Phi*) are shown in Fig. 26. In the uniaxial crystal, z axis is the *optical axis*. Then, principal refractive indices $n_x = n_y = n_o$ and $n_z = n_e$.

In uniaxial crystals, all possible phase-matching angles are calculated. In biaxial crystals, the phase matching is calculated only in one chosen plane.

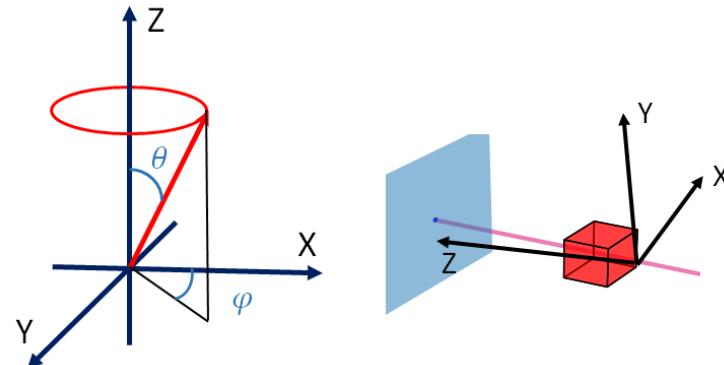


Figure 26: Left: Euler angles θ and φ (*Theta* and *Phi*) in the Cartesian coordinate system x , y , z . Right: coordinate system for uniaxial crystal.

2.2.7 Calculate the noncollinear interaction

- To change the Euler angle θ_1 of pump 1 wave one can either write the value in the Edit box or rotate the cube, Fig. 27.
- To change the tilt angle between the pump 1 and pump 2 waves one can either write the value in the Edit box or move the slider, Fig. 27.
- In the case of uniaxial crystals, one can edit both *THETA1* and *TILT* angles. In the case of biaxial crystals one edits only *TILT* angle.

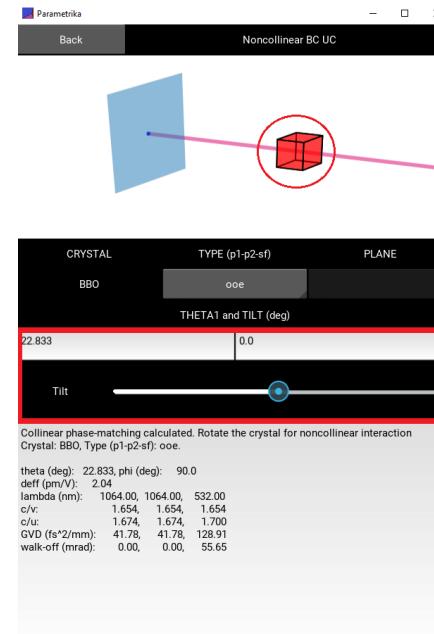


Figure 27: Change *THETA1* the *TILT* angles.

- Dispersion parameters for all three interacting waves are shown in the output box 1 (Fig. 28).
- The crystal and output waves are visualized in the graphic box 2 (Fig. 28).

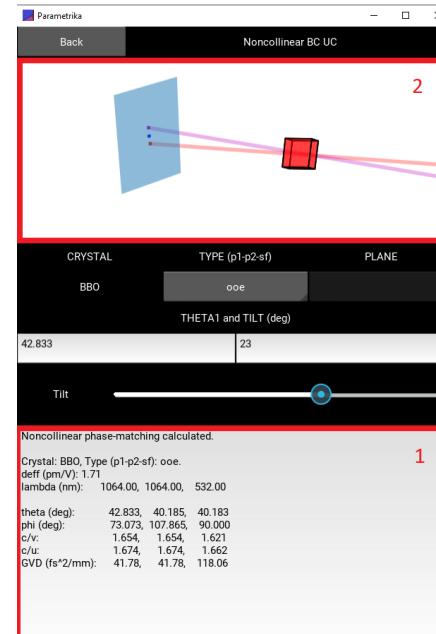


Figure 28: Visualization and information boxes.

2.2.8 3D visualization

- *Uniaxial crystal.* The crystal is cut with respect to the collinear phase-matching angle θ_p and angle φ corresponds to the optimal d_{eff} (Fig. 29a). In the case of the noncollinear phase-matching, the tilt angle is the angle between the *pump 1* and *pump 2* waves (Fig. 29b).
- *Biaxial crystal.* The chosen plane is horizontal and the crystal is cut with respect to the collinear phase matching angle. By varying the tilt angle the noncollinear phase-matching is calculated (Fig. 29c). Rotation out of the plane is prohibited.

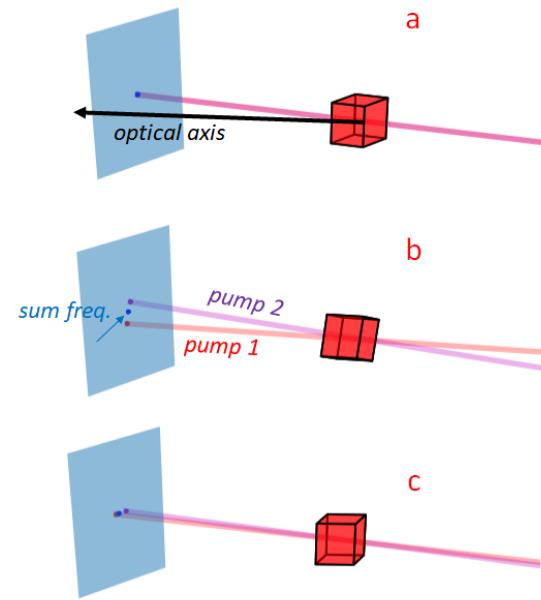


Figure 29: Visualization of (a) collinear phase-matching in uniaxial crystal; (b) noncollinear phase-matching in uniaxial crystal; (c) noncollinear phase-matching in biaxial crystal.

2.2.9 Dispersion parameters

The dispersion parameters are found by the use of the Sellmeier equations from [1].

List of the parameters (Fig. 30):

- c/v : refractive index.
- c/u : fraction of speed of light to the group velocity.
- GVD : group velocity dispersion coefficient.
- *walk-off*: the walk of angle.

The effective nonlinear susceptibility d_{eff} is found by the use of formulas given in [1]. This parameter is wavelength- and angle- dependent.

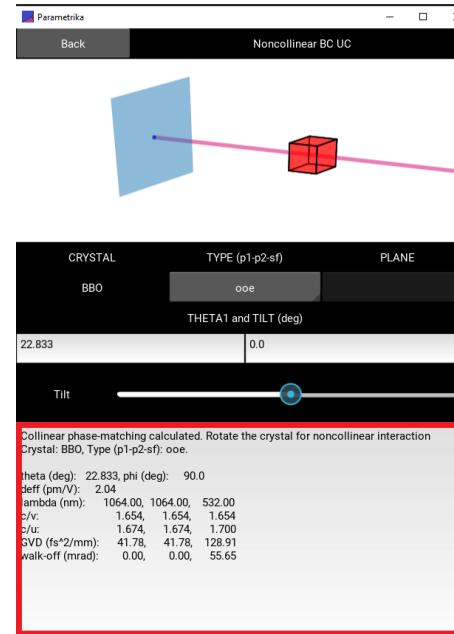


Figure 30: Dispersion parameters in the information box.

3 Module *PP Crystals*

3.1 Module *Down-conversion*

3.1.1 Three interacting waves

The quasi-phasematching for optical parametric down-conversion in the periodically poled crystal is calculated. Three interacting waves, their angular frequencies and wavelengths:

- *Pump*: ω_3, λ_3 .
- *Signal*: ω_1, λ_1 .
- *Idler*: ω_2, λ_2 .

Conservation law of the photon energy (Fig. 31):

$$\hbar\omega_3 = \hbar\omega_1 + \hbar\omega_2, \quad (5)$$

where \hbar is the reduced Plank constant. $\omega = 2\pi c/\lambda$, where c is speed of light.

Therefore:

$$\frac{1}{\lambda_3} = \frac{1}{\lambda_1} + \frac{1}{\lambda_2}. \quad (6)$$

In the periodically poled crystal, quasi-phasematching condition reads:

$$\frac{2\pi n_3}{\lambda_3} - \frac{2\pi n_1}{\lambda_1} - \frac{2\pi n_2}{\lambda_2} = \frac{2\pi}{\Lambda}. \quad (7)$$

Here, n and Λ are the refractive index and lattice period, respectively. Lattice wavenumber $k_g = \frac{2\pi}{\Lambda}$. Phase-matching scheme is depicted in Fig. 32.

Refractive index is a wavelength and temperature function $n(\lambda, T)$.

The user should provide *Pump wavelength* λ_3 and *Temperature* T .

Either *Signal wavelength* λ_1 or *Lattice period* Λ should be provided, then the remaining can be calculated.

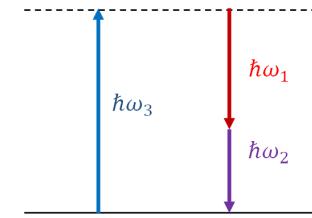


Figure 31: Scheme of photon energies in the optical parametric down-conversion.

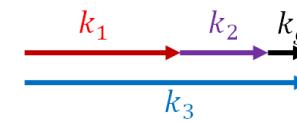


Figure 32: Collinear quasi-phasematching in the periodically poled crystal. \mathbf{k}_1 , \mathbf{k}_2 and \mathbf{k}_3 are the wavevectors of signal, idler and pump waves, respectively. \mathbf{k}_g is the lattice wavevector.

3.1.2 Nonlinear crystals

List of nonlinear crystals (Fig. 33):

- *PPKTP*, Periodically Poled Potassium Titanyl Phosphate (biaxial).
- *PPLN-cm*, Periodically Poled Congruent Lithium Niobate (uniaxial).
- *PPLN-sm*, Periodically Poled Stoichiometric Lithium Niobate (uniaxial).
- *PPRTA*, Periodically Poled Rubidium Titanyl Arsenate (biaxial).

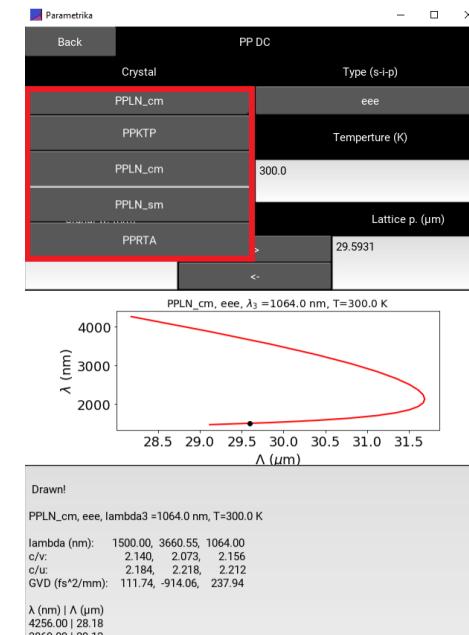


Figure 33: Select crystal drop-down menu.

3.1.3 Interaction type

Uniaxial crystals. In the interaction type, the notations are in the following order: signal-idler-pump, e.g. *ooe* means that signal and idler waves are ordinary waves and pump wave is extraordinary wave.

List of interaction types for uniaxial crystals (Fig. 34):

- *eee*
- *ooe*
- *oeo*
- *eoo*

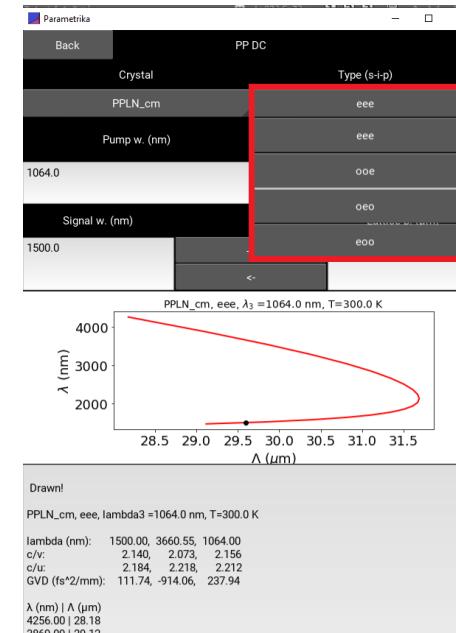


Figure 34: Select type drop-down menu. Uniaxial crystals.

Biaxial crystals. In the interaction type, the notations are in the following order: signal-idler-pump. For example, the interaction type ZZZ means, that the refractive indices of all three interacting waves are the principal refractive indices $n_z(\lambda, T)$.

List of the interaction types in biaxial crystals (Fig. 35):

- ZZZ
- YZY
- YYZ
- XZX
- XXZ

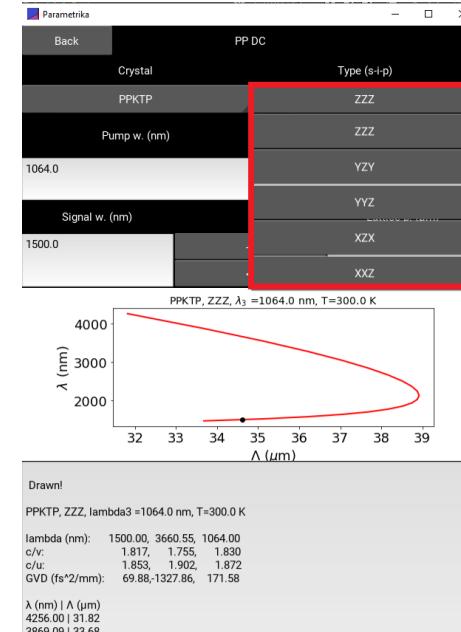


Figure 35: Select type drop-down menu. Biaxial crystals.

3.1.4 Pump wavelength and temperature

Pump wavelength and temperature should be provided in *Pump w.* and *Temperature* boxes, respectively (Fig. 36).

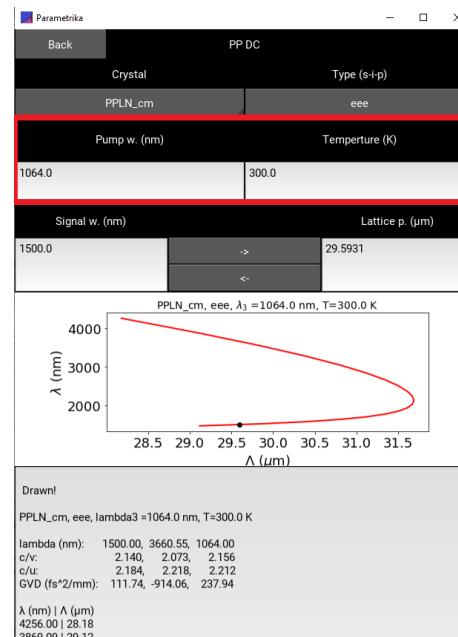


Figure 36: *Pump w.* and *Temperature* edit boxes.

3.1.5 Signal wavelength and lattice period

One of the edit boxes, either *Signal w.* or *Lattice p.*, should be filled. Then, by clicking either right or left arrow (Fig. 37) the remaining parameter is calculated: either lattice period or signal wavelength.

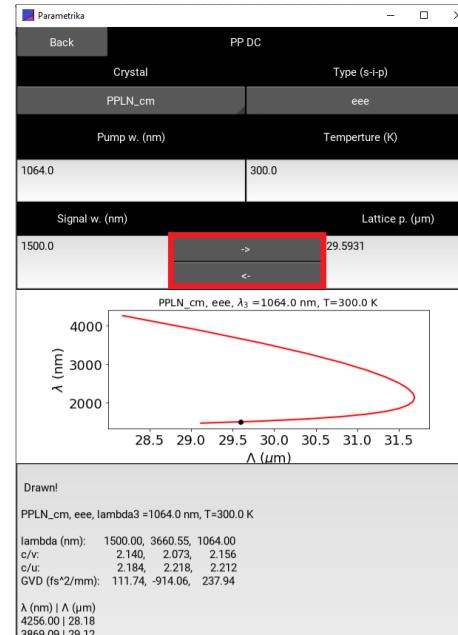


Figure 37: Calculate lattice period or signal wavelength.

3.1.6 Graph

- The graph of the dependence $\lambda(\Lambda)$ is drawn, red line. The black dot notes the values given in *Signal w.* and *Lattice p.* boxes, (Fig. 38)

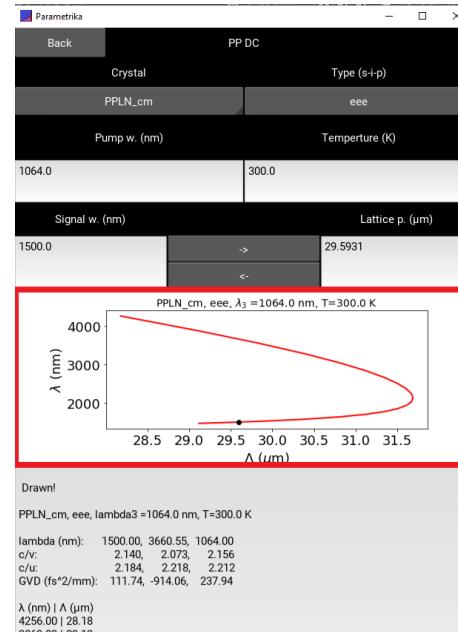


Figure 38: Draw $\lambda(\Lambda)$ graph.

3.1.7 Output data

- Output data is presented in the output window, Fig. 39.
- The data of $\lambda(\Lambda)$ graph (Fig. 38) is presented in the output window, Fig. 39. It can be copied and pasted in MS Excel data sheet. In Excel, select the left column and perform *Data → Text to Columns*.
- The dispersion parameters are shown in the output window, Fig. 39:
 - c/v : refractive index.
 - c/u : fraction of speed of light to the group velocity.
 - GVD : group velocity dispersion coefficient.

PPLN_cm, eee, lambda3 =1064.0 nm, T=300.0 K		
lambda (nm):	1500.00,	3660.55,
c/v:	2.140,	2.073,
c/u:	2.184,	2.218,
GVD (fs^2/mm):	111.74,	-914.06,
		237.94
λ (nm) Λ (μ m)		
4256.00 28.18		
3869.09 29.12		
3546.67 29.84		
3273.85 30.39		

Figure 39: Output data.

3.2 Module Up-conversion

3.2.1 Three interacting waves

The quasi-phasematching for optical parametric up-conversion in the periodically poled crystal is calculated. Three interacting waves, their angular frequencies and wavelengths:

- *Pump 1*: ω_1, λ_1 .
- *Pump 2*: ω_2, λ_2 .
- *Sum Frequency*: ω_3, λ_3 .

Conservation law of the photon energy (Fig. 40):

$$\hbar\omega_1 + \hbar\omega_2 = \hbar\omega_3, \quad (8)$$

where \hbar is the reduced Plank constant. $\omega = 2\pi c/\lambda$, where c is speed of light.

Therefore:

$$\frac{1}{\lambda_1} + \frac{1}{\lambda_2} = \frac{1}{\lambda_3}. \quad (9)$$

In the periodically poled crystal, quasi-phasematching condition reads:

$$\frac{2\pi n_3}{\lambda_3} - \frac{2\pi n_1}{\lambda_1} - \frac{2\pi n_2}{\lambda_2} = \frac{2\pi}{\Lambda}. \quad (10)$$

Here, n and Λ are the refractive index and lattice period, respectively. Lattice wavenumber $k_g = \frac{2\pi}{\Lambda}$. Phase-matching scheme is depicted in Fig. 41.

Refractive index is a wavelength and temperature function $n(\lambda, T)$.

The user should provide wavelengths of *Pump 1* λ_1 and *Pump 2* λ_2 . The wavelength of *Sum freq.* λ_3 is calculated by the use of Eq. (9).

The calculations are performed at the temperature $T = 300$ K.

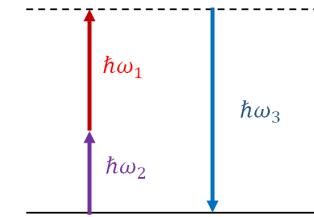


Figure 40: Scheme of photon energies in the optical parametric up-conversion.

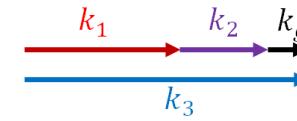


Figure 41: Collinear quasi-phasematching in the periodically poled crystal. \mathbf{k}_1 , \mathbf{k}_2 and \mathbf{k}_3 are the wavevectors of pump 1, pump 2 and sum frequency waves, respectively. \mathbf{k}_g is the lattice wavevector.

3.2.2 Nonlinear crystals

List of nonlinear crystals (Fig. 42):

- *PPKTP*, Periodically Poled Potassium Titanyl Phosphate (biaxial).
- *PPLN-cm*, Periodically Poled Congruent Lithium Niobate (uniaxial).
- *PPLN-sm*, Periodically Poled Stoichiometric Lithium Niobate (uniaxial).
- *PPRTA*, Periodically Poled Rubidium Titanyl Arsenate (biaxial).

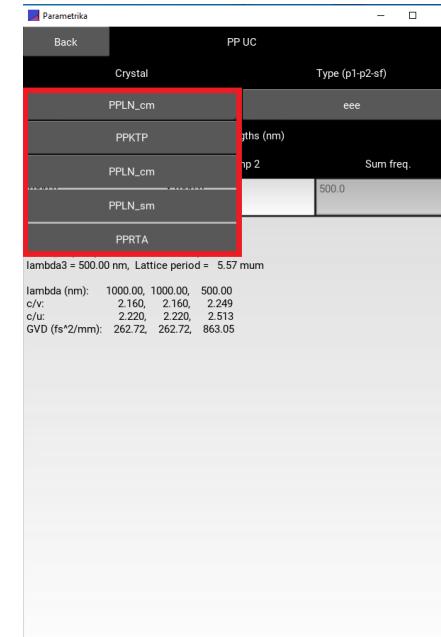


Figure 42: Select crystal drop-down menu.

3.2.3 Interaction type

Uniaxial crystals. In the interaction type, the notations are in the following order: pump 1-pump 2-sum frequency, e.g. *ooe* means that both pump waves are ordinary waves and sum frequency wave is extraordinary wave.

List of interaction types for uniaxial crystals (Fig. 43):

- *eee*
- *ooe*
- *oeo*
- *eoo*

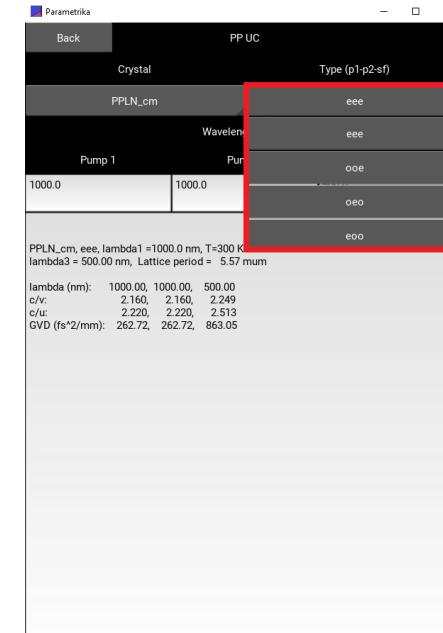


Figure 43: Select type drop-down menu. Uniaxial crystals.

Biaxial crystals. In the interaction type, the notations are in the following order: pump 1-pump 2-sum frequency. For example, the interaction type ZZZ means, that the refractive indices of all three interacting waves are the principal refractive indices $n_z(\lambda, T)$.

List of the interaction types in biaxial crystals (Fig. 44):

- ZZZ
- YZY
- YYZ
- XZX
- XXZ

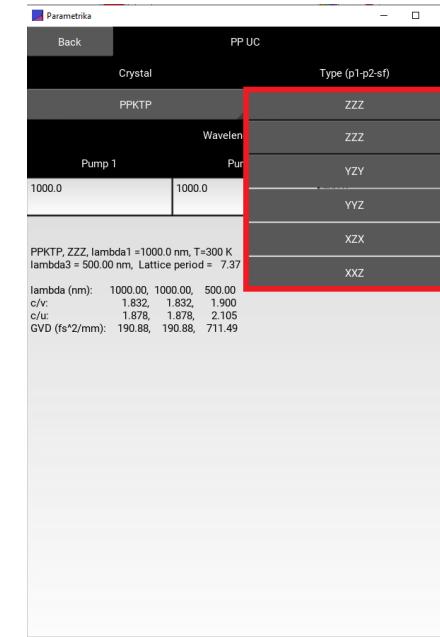


Figure 44: Select type drop-down menu. Biaxial crystals.

3.2.4 Pump wavelengths

Pump wavelengths should be provided in *Pump 1* and *Pump 2* edit boxes, respectively (Fig. 45).

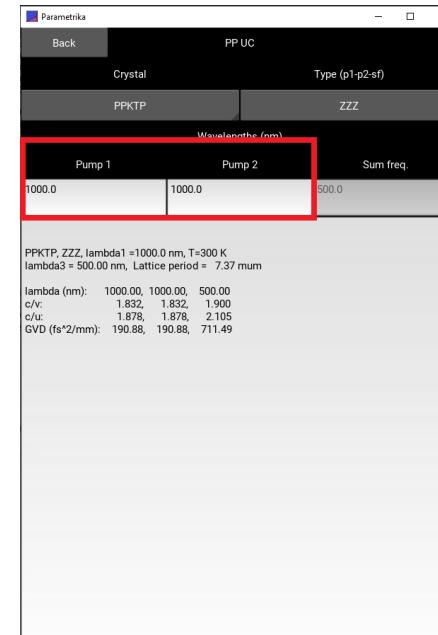


Figure 45: *Pump 1* and *Pump 2* edit boxes.

3.2.5 Output

- Output data is presented in the output window, Fig. 46.
- The dispersion parameters are shown in the output window, Fig. 46:
 - c/v : refractive index.
 - c/u : fraction of speed of light to the group velocity.
 - GVD : group velocity dispersion coefficient.
- Lattice period is calculated.

```

PPKTP, ZZZ, lambda1 =1000.0 nm, T=300 K
lambda3 = 500.00 nm, Lattice period = 7.37 mum

lambda (nm): 1000.00, 1000.00, 500.00
c/v:          1.832,   1.832,   1.900
c/u:          1.878,   1.878,   2.105
GVD (fs^2/mm): 190.88, 190.88, 711.49

```

Figure 46: Output box.

4 What's inside? Formulas

4.1 Bulk crystals. Down-conversion

4.1.1 Notations

- Indices 1,2,3 stand for signal, idler and pump waves, respectively.
- $n_o(\lambda)$ and $n_e(\lambda)$ are the principle refractive indices of the uniaxial crystal.
- $n_x(\lambda)$, $n_y(\lambda)$ and $n_z(\lambda)$ are the principle refractive indices of the biaxial crystal.
- θ and φ are the Euler angles.

4.1.2 Phase-matching

Uniaxial crystal. Collinear phase-matching

Type oee

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1k_3(\theta_3) + (k_2^2 - k_3^2(\theta_3) - k_1^2) = 0, \quad (11)$$

where

$$k_1 = \frac{n_o(\lambda_1)}{\lambda_1}, \quad k_2 = \frac{n_o(\lambda_2)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (12)$$

and

$$\frac{1}{[n^{(e)}(\lambda_3, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_3)} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_3)}. \quad (13)$$

Type oee

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1k_3(\theta_3) + (k_2^2(\theta_3) - k_3^2(\theta_3) - k_1^2) = 0, \quad (14)$$

where

$$k_1 = \frac{n_o(\lambda_1)}{\lambda_1}, \quad k_2(\theta_3) = \frac{n^{(e)}(\lambda_2, \theta_3)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (15)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{2,3}, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_{2,3})} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_{2,3})}. \quad (16)$$

Type eoe

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1(\theta_3)k_3(\theta_3) + (k_2^2 - k_3^2(\theta_3) - k_1^2(\theta_3)) = 0, \quad (17)$$

where

$$k_1(\theta_3) = \frac{n^{(e)}(\lambda_1, \theta_3)}{\lambda_1}, \quad k_2 = \frac{n_o(\lambda_2)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (18)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{1,3}, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_{1,3})} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_{1,3})}. \quad (19)$$

Type eeo

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1(\theta_3)k_3 + (k_2^2(\theta_3) - k_3^2 - k_1^2(\theta_3)) = 0, \quad (20)$$

where

$$k_1(\theta_3) = \frac{n^{(e)}(\lambda_1, \theta_3)}{\lambda_1}, \quad k_2(\theta_3) = \frac{n^{(e)}(\lambda_2, \theta_3)}{\lambda_2}, \quad k_3 = \frac{n_o(\lambda_3)}{\lambda_3} \quad (21)$$

and

$$\frac{1}{[n^{(e)}(\lambda_2, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_2)} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_2)}. \quad (28)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{1,2}, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_{1,2})} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_{1,2})}. \quad (22)$$

Type eoo

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1(\theta_3)k_3 + (k_2^2 - k_3^2 - k_1^2(\theta_3)) = 0, \quad (23)$$

where

$$k_1(\theta_3) = \frac{n^{(e)}(\lambda_1, \theta_3)}{\lambda_1}, \quad k_2 = \frac{n_o(\lambda_2)}{\lambda_2}, \quad k_3 = \frac{n_o(\lambda_3)}{\lambda_3} \quad (24)$$

and

$$\frac{1}{[n^{(e)}(\lambda_1, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_1)} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_1)}. \quad (25)$$

Type oeo

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1k_3 + (k_2^2(\theta_3) - k_3^2 - k_1^2) = 0, \quad (26)$$

where

$$k_1 = \frac{n_o(\lambda_1)}{\lambda_1}, \quad k_2(\theta_3) = \frac{n^{(e)}(\lambda_2, \theta_3)}{\lambda_2}, \quad k_3 = \frac{n_o(\lambda_3)}{\lambda_3} \quad (27)$$

Uniaxial crystal. Noncollinear phase-matching

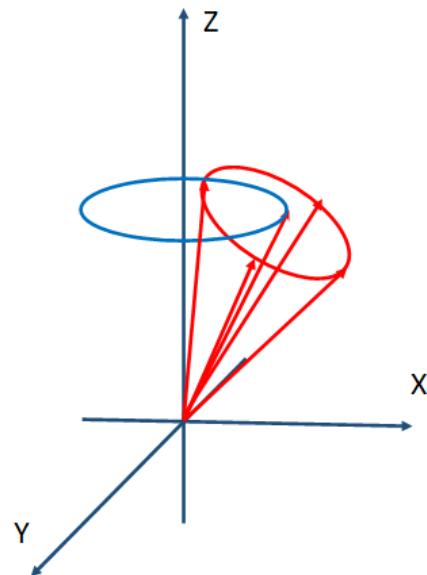


Figure 47: Signal wave cone (red) in the case of noncollinear interaction in the uniaxial crystal. Blue line notes possible directions of the pump wave.

- Euler angles θ_3 and φ_3 are given (taken from inputs *Theta* and *Phi*).
- Define $\beta = \pi/2 - \theta_3$.

- Involve into consideration angle γ , that is varied from 0 to 2π , that will give a ring-type profiles of the signal and idler waves at the output, Fig. 47.
- The goal is to obtain the series of angles (θ_1, φ_1) , (θ_2, φ_2) .

Type ooe

First, calculate the noncollinear angle α between the pump and signal waves:

$$\alpha = -\arccos\left(-\frac{k_2^2 - k_3^2(\theta_3) - k_1^2}{2k_1k_3(\theta_3)}\right). \quad (29)$$

k_1 , k_2 and $k_3(\theta_3)$ are found from Eq. (12). Then, for each γ find signal wave angle θ_1 :

$$\theta_1 = \arccos(\cos(\alpha)\sin(\beta) + \sin(\alpha)\cos(\gamma)\cos(\beta)). \quad (30)$$

Find signal wave angle φ_1 :

$$\varphi_1 = \pm \arccos\left(\frac{\cos(\alpha)\cos(\beta) - \sin(\alpha)\cos(\gamma)\sin(\beta)}{\sin(\theta_1)}\right) + \varphi_3. \quad (31)$$

Find idler wave angle θ_2 :

$$\theta_2 = \arccos\left(\frac{k_3(\theta_3)\cos(\theta_3) - k_1\cos(\theta_1)}{k_2}\right). \quad (32)$$

Find idler wave angle φ_2 :

$$\varphi_2 = \arcsin\left(\frac{k_3(\theta_3)\sin(\theta_3)\sin(\varphi_3) - k_1\sin(\theta_1)\sin(\varphi_1)}{k_2\sin(\theta_2)}\right). \quad (33)$$

Type eoe

First, define the noncollinear angle between the signal and pump waves $\alpha(\theta_1)$:

$$\alpha(\theta_1) = -\arccos \left(-\frac{k_2^2 - k_3^2(\theta_3) - k_1^2(\theta_1)}{2k_1(\theta_1)k_3(\theta_3)} \right). \quad (34)$$

$k_1(\theta_1)$, k_2 and $k_3(\theta_3)$ are found from Eq. (18). Then, numerically calculate signal wave angle θ_1 for each γ from the equation:

$$\cos(\theta_1) = \cos(\alpha(\theta_1)) \sin(\beta) + \sin(\alpha(\theta_1)) \cos(\gamma) \cos(\beta). \quad (35)$$

Find signal wave angle φ_1 :

$$\varphi_1 = \pm \arccos \left(\frac{\cos(\alpha(\theta_1)) \cos(\beta) - \sin(\alpha(\theta_1)) \cos(\gamma) \sin(\beta)}{\sin(\theta_1)} \right) + \varphi_3. \quad (36)$$

Find idler wave angle θ_2 :

$$\theta_2 = \arccos \left(\frac{k_3(\theta_3) \cos(\theta_3) - k_1(\theta_1) \cos(\theta_1)}{k_2} \right). \quad (37)$$

Find idler wave angle φ_2 :

$$\varphi_2 = \arcsin \left(\frac{k_3(\theta_3) \sin(\theta_3) \sin(\varphi_3) - k_1(\theta_1) \sin(\theta_1) \sin(\varphi_1)}{k_2 \sin(\theta_2)} \right). \quad (38)$$

Type oee

First, define the noncollinear angle between the idler and pump waves $\alpha(\theta_2)$:

$$\alpha(\theta_2) = -\arccos \left(-\frac{k_1^2 - k_3^2(\theta_3) - k_2^2(\theta_2)}{2k_2(\theta_2)k_3(\theta_3)} \right). \quad (39)$$

k_1 , $k_2(\theta_2)$ and $k_3(\theta_3)$ are found from Eq. (15). Then, numerically calculate idler wave angle θ_2 for each γ from the equation:

$$\cos(\theta_2) = \cos(\alpha(\theta_2)) \sin(\beta) + \sin(\alpha(\theta_2)) \cos(\gamma) \cos(\beta). \quad (40)$$

Find idler wave angle φ_2 :

$$\varphi_2 = \pm \arccos \left(\frac{\cos(\alpha(\theta_2)) \cos(\beta) - \sin(\alpha(\theta_2)) \cos(\gamma) \sin(\beta)}{\sin(\theta_2)} \right) + \varphi_3. \quad (41)$$

Find signal wave angle θ_1 :

$$\theta_1 = \arccos \left(\frac{k_3(\theta_3) \cos(\theta_3) - k_2(\theta_2) \cos(\theta_2)}{k_1} \right). \quad (42)$$

Find signal wave angle φ_1 :

$$\varphi_1 = \arcsin \left(\frac{k_3(\theta_3) \sin(\theta_3) \sin(\varphi_3) - k_2(\theta_2) \sin(\theta_2) \sin(\varphi_2)}{k_1 \sin(\theta_1)} \right). \quad (43)$$

Type eeo

Find signal wave angle θ_1 solving numerically the equation:

$$k_2^2(\theta_{2x}(\theta_1)) - k_{2x}^2(\theta_1) = 0, \quad (44)$$

where

$$k_{2x}^2(\theta_1) = k_3^2 + k_1^2(\theta_1) - 2k_1(\theta_1)k_3 \cos(\alpha(\theta_1)), \quad (45)$$

$$\cos(\alpha(\theta_1)) = \frac{\cos(\theta_1) \sin(\beta) + \cos(\gamma) \cos(\beta) \sqrt{\sin^2(\theta_1) - \sin^2(\gamma) \cos^2(\beta)}}{1 - \sin^2(\gamma) \cos^2(\beta)}. \quad (46)$$

Eq. (46) was found from

$$\cos(\theta_1) = \cos(\alpha(\theta_1)) \sin(\beta) + \sin(\alpha(\theta_1)) \cos(\gamma) \cos(\beta). \quad (47)$$

$k_2(\theta_{2x}(\theta_1)) = \frac{n^{(e)}(\lambda_2, \theta_{2x}(\theta_1))}{\lambda_2}$ and $\theta_{2x}(\theta_1)$ is expressed from

$$\cos(\theta_{2x}(\theta_1)) = (k_3 \cos(\theta_3) - k_1(\theta_1) \cos(\theta_1)) / k_{2x}(\theta_1). \quad (48)$$

Here, $k_1(\theta_1) = \frac{n^{(e)}(\lambda_1, \theta_1)}{\lambda_1}$, $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$. After solving Eq. (44) and finding θ_1 , find idler wave angle θ_2 from Eq. (48). Then find angles φ_2 (idler wave) and φ_1 (signal wave):

$$\varphi_2 = \varphi_3 \pm \arccos \left(\frac{k_3^2 + k_2^2(\theta_2) - k_1^2(\theta_1) - 2k_3 k_2(\theta_2) \cos(\theta_3) \cos(\theta_2)}{2k_3 k_2(\theta_2) \sin(\theta_3) \sin(\theta_2)} \right), \quad (49)$$

$$\varphi_1 = \arcsin \left(\frac{k_3 \sin(\theta_3) \sin(\varphi_3) - k_2(\theta_2) \sin(\theta_2) \sin(\varphi_2)}{k_1(\theta_1) \sin(\theta_1)} \right). \quad (50)$$

Type oeo

Find signal wave angle θ_1 solving numerically the equation:

$$k_2^2(\theta_{2x}(\theta_1)) - k_{2x}^2(\theta_1) = 0, \quad (51)$$

where

$$k_{2x}^2(\theta_1) = k_3^2 + k_1^2 - 2k_1 k_3 \cos(\alpha(\theta_1)), \quad (52)$$

$$\cos(\alpha(\theta_1)) = \frac{\cos(\theta_1) \sin(\beta) + \cos(\gamma) \cos(\beta) \sqrt{\sin^2(\theta_1) - \sin^2(\gamma) \cos^2(\beta)}}{1 - \sin^2(\gamma) \cos^2(\beta)}. \quad (53)$$

Eq. (53) was found from

$$\cos(\theta_1) = \cos(\alpha(\theta_1)) \sin(\beta) + \sin(\alpha(\theta_1)) \cos(\gamma) \cos(\beta). \quad (54)$$

$k_2(\theta_{2x}(\theta_1)) = \frac{n^{(e)}(\lambda_2, \theta_{2x}(\theta_1))}{\lambda_2}$ and $\theta_{2x}(\theta_1)$ is expressed from

$$\cos(\theta_{2x}(\theta_1)) = (k_3 \cos(\theta_3) - k_1 \cos(\theta_1)) / k_{2x}(\theta_1). \quad (55)$$

Here, $k_1 = \frac{n_o(\lambda_1)}{\lambda_1}$, $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$. After solving Eq. (51) and finding θ_1 , find idler wave angle θ_2 from Eq. (55). Then find angles φ_2 (idler wave) and φ_1 (signal wave):

$$\varphi_2 = \varphi_3 \pm \arccos \left(\frac{k_3^2 + k_2^2(\theta_2) - k_1^2 - 2k_3 k_2(\theta_2) \cos(\theta_3) \cos(\theta_2)}{2k_3 k_2(\theta_2) \sin(\theta_3) \sin(\theta_2)} \right), \quad (56)$$

$$\varphi_1 = \arcsin \left(\frac{k_3 \sin(\theta_3) \sin(\varphi_3) - k_2(\theta_2) \sin(\theta_2) \sin(\varphi_2)}{k_1 \sin(\theta_1)} \right). \quad (57)$$

Type eoo

Find signal wave angle θ_2 solving numerically the equation:

$$k_1^2(\theta_{1x}(\theta_2)) - k_{1x}^2(\theta_2) = 0, \quad (58)$$

where

$$k_{1x}^2(\theta_2) = k_3^2 + k_2^2 - 2k_2 k_3 \cos(\alpha(\theta_2)), \quad (59)$$

$$\cos(\alpha(\theta_2)) = \frac{\cos(\theta_2) \sin(\beta) + \cos(\gamma) \cos(\beta) \sqrt{\sin^2(\theta_2) - \sin^2(\gamma) \cos^2(\beta)}}{1 - \sin^2(\gamma) \cos^2(\beta)}. \quad (60)$$

Eq. (60) was found from

$$\cos(\theta_2) = \cos(\alpha(\theta_2)) \sin(\beta) + \sin(\alpha(\theta_2)) \cos(\gamma) \cos(\beta). \quad (61)$$

$k_1(\theta_{1x}(\theta_2)) = \frac{n^{(e)}(\lambda_1, \theta_{1x}(\theta_2))}{\lambda_1}$ and $\theta_{1x}(\theta_2)$ is expressed from

$$\cos(\theta_{1x}(\theta_2)) = (k_3 \cos(\theta_3) - k_1 \cos(\theta_1)) / k_{1x}(\theta_2). \quad (62)$$

Here, $k_2 = \frac{n_o(\lambda_2)}{\lambda_2}$, $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$. After solving Eq. (58) and finding θ_2 , find idler wave angle θ_1 from Eq. (62). Then find angles φ_1 (signal wave) and φ_2 (idler wave):

$$\varphi_1 = \varphi_3 \pm \arccos \left(\frac{k_3^2 + k_1^2(\theta_1) - k_2^2 - 2k_3k_1(\theta_1)\cos(\theta_3)\cos(\theta_1)}{2k_3k_1(\theta_1)\sin(\theta_3)\sin(\theta_1)} \right), \quad (63)$$

$$\varphi_2 = \arcsin \left(\frac{k_3 \sin(\theta_3) \sin(\varphi_3) - k_1(\theta_1) \sin(\theta_1) \sin(\varphi_1)}{k_2 \sin(\theta_2)} \right). \quad (64)$$

Biaxial crystal. Collinear phase-matching

For three different planes, we label the refractive indices $n_o(\lambda)$, $n_e(\lambda)$ and $n_p(\lambda)$ as follows:

- **XY plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_x(\lambda)$, $n_p(\lambda) = n_z(\lambda)$.
- **XZ plane.** $n_o(\lambda) = n_x(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_y(\lambda)$.
- **YZ plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_x(\lambda)$.

Type ooe

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1k_3(\theta_3) + (k_2^2 - k_3^2(\theta_3) - k_1^2) = 0, \quad (65)$$

where

$$k_1 = \frac{n_p(\lambda_1)}{\lambda_1}, \quad k_2 = \frac{n_p(\lambda_2)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (66)$$

and

$$\frac{1}{[n^{(e)}(\lambda_3, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_3)} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_3)}. \quad (67)$$

Type oee

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1k_3(\theta_3) + (k_2^2(\theta_3) - k_3^2(\theta_3) - k_1^2) = 0, \quad (68)$$

where

$$k_1 = \frac{n_p(\lambda_1)}{\lambda_1}, \quad k_2(\theta_3) = \frac{n^{(e)}(\lambda_2, \theta_3)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (69)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{2,3}, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_{2,3})} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_{2,3})}. \quad (70)$$

Type eoo

The phase-matching angle $\theta_p = \theta_3$ is found solving the following equation numerically:

$$2k_1(\theta_3)k_3(\theta_3) + (k_2^2 - k_3^2(\theta_3) - k_1^2(\theta_3)) = 0, \quad (71)$$

where

$$k_1(\theta_3) = \frac{n^{(e)}(\lambda_1, \theta_3)}{\lambda_1}, \quad k_2 = \frac{n_p(\lambda_2)}{\lambda_2}, \quad k_3(\theta_3) = \frac{n^{(e)}(\lambda_3, \theta_3)}{\lambda_3} \quad (72)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{1,3}, \theta_3)]^2} = \frac{\cos^2(\theta_3)}{n_o^2(\lambda_{1,3})} + \frac{\sin^2(\theta_3)}{n_e^2(\lambda_{1,3})}. \quad (73)$$

Type eeo

The phase-matching angle $\theta_p = \theta_1$ is found solving the following equation numerically:

$$2k_1(\theta_p)k_3 + (k_2^2(\theta_p) - k_3^2 - k_1^2(\theta_p)) = 0, \quad (74)$$

where

$$k_1(\theta_p) = \frac{n^{(e)}(\lambda_1, \theta_p)}{\lambda_1}, \quad k_2(\theta_p) = \frac{n^{(e)}(\lambda_2, \theta_p)}{\lambda_2}, \quad k_3 = \frac{n_p(\lambda_3)}{\lambda_3} \quad (75)$$

and

$$\frac{1}{[n^{(e)}(\lambda_{1,2}, \theta_p)]^2} = \frac{\cos^2(\theta_p)}{n_o^2(\lambda_{1,2})} + \frac{\sin^2(\theta_p)}{n_e^2(\lambda_{1,2})}. \quad (76)$$

Type eoo

The phase-matching angle $\theta_p = \theta_1$ is found solving the following equation numerically:

$$2k_1(\theta_p)k_3 + (k_2^2 - k_3^2 - k_1^2(\theta_p)) = 0, \quad (77)$$

where

$$k_1(\theta_p) = \frac{n^{(e)}(\lambda_1, \theta_p)}{\lambda_1}, \quad k_2 = \frac{n_p(\lambda_2)}{\lambda_2}, \quad k_3 = \frac{n_p(\lambda_3)}{\lambda_3} \quad (78)$$

and

$$\frac{1}{[n^{(e)}(\lambda_1, \theta_p)]^2} = \frac{\cos^2(\theta_p)}{n_o^2(\lambda_1)} + \frac{\sin^2(\theta_p)}{n_e^2(\lambda_1)}. \quad (79)$$

Type oeo

The phase-matching angle $\theta_p = \theta_2$ is found solving the following equation numerically:

$$2k_1k_3 + (k_2^2(\theta_p) - k_3^2 - k_1^2) = 0, \quad (80)$$

where

$$k_1 = \frac{n_p(\lambda_1)}{\lambda_1}, \quad k_2(\theta_p) = \frac{n^{(e)}(\lambda_2, \theta_p)}{\lambda_2}, \quad k_3 = \frac{n_p(\lambda_3)}{\lambda_3} \quad (81)$$

and

$$\frac{1}{[n^{(e)}(\lambda_2, \theta_p)]^2} = \frac{\cos^2(\theta_p)}{n_o^2(\lambda_2)} + \frac{\sin^2(\theta_p)}{n_e^2(\lambda_2)}. \quad (82)$$

Biaxial crystal. Noncollinear phase-matching

First, convert the input Euler angles *Theta* and *Phi* to angle θ_p by the following rules:

- **XY plane.** θ_p takes the *Phi* value.
- **XZ plane.** θ_p takes the *Theta* value.
- **YZ plane.** θ_p takes the *Theta* value.

Goal: calculate phase-matching angles θ_{p1} , θ_{p2} and θ_{p3} for signal, idler and pump waves, respectively. Then, convert them to the propagation angles by the following rule:

- **XY plane.** $\theta_{1,2,3} = \frac{\pi}{2}$, $\varphi_{1,2,3} = \theta_{p1,2,3}$.
- **XZ plane.** $\theta_{1,2,3} = \theta_{p1,2,3}$, $\varphi_{1,2,3} = 0$.
- **YZ plane.** $\theta_{1,2,3} = \theta_{p1,2,3}$, $\varphi_{1,2,3} = \frac{\pi}{2}$.

For three different planes, we label the refractive indices $n_o(\lambda)$, $n_e(\lambda)$ and $n_p(\lambda)$ as follows:

- **XY plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_x(\lambda)$, $n_p(\lambda) = n_z(\lambda)$.
- **XZ plane.** $n_o(\lambda) = n_x(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_y(\lambda)$.
- **YZ plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_x(\lambda)$.

To make the notations shorter, we write n_{e1} instead of $n_e(\lambda_1)$ and so on.

Type oee

The noncollinear angles α_1 and α_2 are found from the equations:

$$\alpha_1 = \arccos\left(-\frac{k_2^2 - k_3^2(\theta_p) - k_1^2}{2k_1k_3(\theta_p)}\right), \quad (83)$$

$$\alpha_2 = -\arccos\left(-\frac{k_1^2 - k_3^2(\theta_p) - k_2^2}{2k_2k_3(\theta_p)}\right), \quad (84)$$

where k_1 , k_2 and $k_3(\theta_p)$ are found from Eq. (66).

Calculate the output angles:

$$\theta_{p1} = \theta_p + \alpha_1, \quad \theta_{p2} = \theta_p + \alpha_2, \quad \theta_{p3} = \theta_p. \quad (85)$$

Type ooe

The noncollinear angle α_2 is found numerically from the equation:

$$2k_2(\theta_p + \alpha_2)k_3(\theta_p)\cos(\alpha_2) + k_1^2 - k_3^2(\theta_p) - k_2^2(\theta_p + \alpha_2) = 0. \quad (86)$$

Find $\theta_{p2} = \theta_p + \alpha_2$. Then, calculate noncollinear angle α_1 :

$$\alpha_1 = -\arccos\left(-\frac{k_2^2(\theta_{p2}) - k_3^2(\theta_p) - k_1^2}{2k_1k_3(\theta_p)}\right). \quad (87)$$

Here, k_1 , $k_2(\theta_{p2})$ and $k_3(\theta_p)$ are found from Eq. (69).

Calculate the output angles:

$$\theta_{p1} = \theta_p + \alpha_1, \quad \theta_{p2} = \theta_p + \alpha_2, \quad \theta_{p3} = \theta_p. \quad (88)$$

Type eoe

The noncollinear angle α_1 is found numerically from the equation:

$$2k_1(\theta_p + \alpha_1)k_3(\theta_p) \cos(\alpha_1) + k_2^2 - k_3^2(\theta_p) - k_1^2(\theta_p + \alpha_1) = 0. \quad (89)$$

Find $\theta_{p1} = \theta_p + \alpha_1$. Then, calculate noncollinear angle α_2 :

$$\alpha_2 = -\arccos\left(-\frac{k_1^2(\theta_{p1}) - k_3^2(\theta_p) - k_2^2}{2k_2k_3(\theta_p)}\right). \quad (90)$$

Here, $k_1(\theta_{p1})$, k_2 and $k_3(\theta_p)$ are found from Eq. (72).

Calculate the output angles:

$$\theta_{p1} = \theta_p + \alpha_1, \quad \theta_{p2} = \theta_p + \alpha_2, \quad \theta_{p3} = \theta_p. \quad (91)$$

Type eeo

Find noncollinear angle α_1 between wavvectors \mathbf{k}_1 and \mathbf{k}_3 from the equation:

$$k_2(\theta_p - \alpha_{2x}(\alpha_1)) - k_{2x}(\alpha_1) = 0, \quad (92)$$

where

$$k_{2x}^2(\alpha_1) = k_1^2(\theta_p + \alpha_1) + k_3^2 - 2k_1(\theta_p + \alpha_1)k_3 \cos(\alpha_1) \quad (93)$$

and α_{2x} is found from

$$k_{2x}(\alpha_1) \cos(\alpha_{2x}) + k_1(\theta_p + \alpha_1) \cos(\alpha_1) = k_3. \quad (94)$$

We use Eq. (75) to calculate $k_1(\theta_1)$, $k_2(\theta_2)$ and k_3 .

Calculate the output angles:

$$\theta_{p1} = \theta_p + \alpha_1, \quad \theta_{p2} = \theta_p - \alpha_{2x}(\alpha_1), \quad \theta_{p3} = \theta_p. \quad (95)$$

Type eoo

Find noncollinear angle α_1 between wavvectors \mathbf{k}_1 and \mathbf{k}_3 from the equation:

$$k_2 - k_{2x}(\alpha_1) = 0, \quad (96)$$

where

$$k_{2x}^2(\alpha_1) = k_1^2(\theta_p + \alpha_1) + k_3^2 - 2k_1(\theta_p + \alpha_1)k_3 \cos(\alpha_1) \quad (97)$$

and further α_{2x} is found from

$$k_{2x}(\alpha_1) \cos(\alpha_{2x}) + k_1(\theta_p + \alpha_1) \cos(\alpha_1) = k_3. \quad (98)$$

We use Eq. (78) to calculate $k_1(\theta_1)$, k_2 and k_3 .

Calculate the output angles:

$$\theta_{p1} = \theta_p + \alpha_1, \quad \theta_{p2} = \theta_p - \alpha_{2x}(\alpha_1), \quad \theta_{p3} = \theta_p. \quad (99)$$

Type oeo

Find noncollinear angle α_2 between wavvectors \mathbf{k}_2 and \mathbf{k}_3 from the equation:

$$k_1 - k_{1x}(\alpha_2) = 0, \quad (100)$$

where

$$k_{1x}^2(\alpha_2) = k_2^2(\theta_p + \alpha_2) + k_3^2 - 2k_2(\theta_p + \alpha_2)k_3 \cos(\alpha_2) \quad (101)$$

and further α_{1x} is found from

$$k_{1x}(\alpha_2) \cos(\alpha_{1x}) + k_2(\theta_p + \alpha_2) \cos(\alpha_2) = k_3. \quad (102)$$

We use Eq. (81) to calculate k_1 , $k_2(\theta_2)$ and k_3 .

Calculate the output angles:

$$\theta_{p1} = \theta_p - \alpha_{1x}(\alpha_2), \quad \theta_{p2} = \theta_p + \alpha_2, \quad \theta_{p3} = \theta_p. \quad (103)$$

4.1.3 Gain band

Gain band formulas:

$$P = 1 + \Gamma^2 \frac{\sinh^2(\sqrt{B}L)}{B}, \quad B > 0. \quad (104)$$

$$P = 1 + \Gamma^2 \frac{\sin^2(\sqrt{|B|}L)}{|B|}, \quad B \leq 0. \quad (105)$$

Here, L is the crystal length,

$$\Gamma = \sqrt{\sigma_1 \sigma_2} a_0 \quad (106)$$

and

$$B = \Gamma^2 - \Delta k^2/4, \quad \Delta k = k_3 - k_1 - k_2, \quad k = \frac{2\pi n}{\lambda}. \quad (107)$$

Nonlinear interaction coefficients:

$$\sigma_{1,2} = \omega_{1,2} \frac{d_{eff}}{cn_{1,2}}. \quad (108)$$

Pump amplitude:

$$a_0 = \sqrt{\frac{2I}{cn_3 \varepsilon_0}}. \quad (109)$$

ε_0 is the vacuum permittivity. I is the intensity.

4.2 Bulk crystals. Up-conversion

4.2.1 Notations

- Indices 1,2,3 stand for pump 1, pump 2 and sum frequency waves, respectively.
- $n_o(\lambda)$ and $n_e(\lambda)$ are the principle refractive indices of the uniaxial crystal.
- $n_x(\lambda)$, $n_y(\lambda)$ and $n_z(\lambda)$ are the principle refractive indices of the biaxial crystal.
- θ and φ are the Euler angles.
- α is a tilt angle between pump 1 and pump 2 waves.

4.2.2 Phase-matching

Uniaxial crystal. Collinear phase-matching

Equations (11)–(28) are utilized to calculate the collinear phase-matching in uniaxial crystal.

Uniaxial crystal. Noncollinear phase-matching

- Euler angle θ_1 and tilt angle α are given.
- Angle φ_3 is calculated at the maximum d_{eff} value for collinear phase-matching at given wavelengths.
- The goal is to find the remaining Euler angles: φ_1 , θ_2 , φ_2 and θ_3 .

To make the notations shorter, we write n_{e1} instead of $n_e(\lambda_1)$ and so on.

Type ooe

First, calculate the wavenumber $k_3(\theta_3)$ from the formula:

$$k_3^2(\theta_3) = k_1^2 + k_2^2 + 2k_1k_2 \cos(\alpha). \quad (110)$$

k_1 and k_2 are found from Eq. (12). Then, find angle θ_3 from:

$$\cos^2(\theta_3) = \frac{1/n_3^{(e)2} - 1/n_{e3}^2}{1/n_{o3}^2 - 1/n_{e3}^2}, \quad (111)$$

where $n_3^{(e)} = k_3(\theta_3)\lambda_3$.

Calculate θ_2 :

$$\theta_2 = \arccos\left(\frac{k_3(\theta_3)\cos(\theta_3) - k_1 \cos(\theta_1)}{k_2}\right). \quad (112)$$

Find angle difference $\Delta\varphi_1 = \varphi_3 - \varphi_1$:

$$\cos(\Delta\varphi_1) = \frac{1}{2} \frac{k_3^2(\theta_3)\sin^2(\theta_3) + k_1^2 \sin^2(\theta_1) - k_2^2 \sin^2(\theta_2)}{k_1k_3(\theta_3)\sin(\theta_1)\sin(\theta_3)}. \quad (113)$$

Then, calculate $\varphi_1 = \varphi_3 - \Delta\varphi_1$. Next, find angle difference $\Delta\varphi_2 = \varphi_2 - \varphi_3$:

$$\cos(\Delta\varphi_2) = \frac{1}{2} \frac{k_3^2(\theta_3)\sin^2(\theta_3) + k_2^2 \sin^2(\theta_2) - k_1^2 \sin^2(\theta_1)}{k_2k_3(\theta_3)\sin(\theta_2)\sin(\theta_3)}. \quad (114)$$

Then, calculate $\varphi_2 = \varphi_3 + \Delta\varphi_2$.

Type eoe

First, calculate the wavenumber $k_3(\theta_3)$ from the formula:

$$k_3^2(\theta_3) = k_1^2(\theta_1) + k_2^2 + 2k_1(\theta_1)k_2 \cos(\alpha). \quad (115)$$

$k_1(\theta_1)$ and k_2 are found from Eq. (18). Then, calculate θ_3 from Eq. (111).

Calculate θ_2 :

$$\theta_2 = \arccos \left(\frac{k_3(\theta_3) \cos(\theta_3) - k_1(\theta_1) \cos(\theta_1)}{k_2} \right). \quad (116)$$

Find angle difference $\Delta\varphi_1 = \varphi_3 - \varphi_1$:

$$\cos(\Delta\varphi_1) = \frac{1}{2} \frac{k_3^2(\theta_3) \sin^2(\theta_3) + k_1^2(\theta_1) \sin^2(\theta_1) - k_2^2 \sin^2(\theta_2)}{k_1(\theta_1) k_3(\theta_3) \sin(\theta_1) \sin(\theta_3)}. \quad (117)$$

Then, calculate $\varphi_1 = \varphi_3 - \Delta\varphi_1$. Next, find angle difference $\Delta\varphi_2 = \varphi_2 - \varphi_3$:

$$\cos(\Delta\varphi_2) = \frac{1}{2} \frac{k_3^2(\theta_3) \sin^2(\theta_3) + k_2^2 \sin^2(\theta_2) - k_1^2(\theta_1) \sin^2(\theta_1)}{k_2 k_3(\theta_3) \sin(\theta_2) \sin(\theta_3)}. \quad (118)$$

Then, calculate $\varphi_2 = \varphi_3 + \Delta\varphi_2$.

Type oee

Find angle θ_2 solving numerically equation:

$$k_2(\theta_2) \cos(\theta_2) - (k_3(\theta_3) \cos(\theta_3) - k_1 \cos(\theta_1)) = 0, \quad (119)$$

where k_1 and $k_2(\theta_2)$ are found from Eq. (15). Here,

$$\cos^2(\theta_3) = \frac{1/n_3^{(e)2} - 1/n_{e3}^2}{1/n_{o3}^2 - 1/n_{e3}^2}, \quad (120)$$

$n_3^{(e)} = k_3(\theta_3)\lambda_3$ and

$$k_3^2(\theta_3) = k_1^2 + k_2^2(\theta_2) + 2k_1 k_2(\theta_2) \cos(\alpha). \quad (121)$$

Find θ_2 and then, from Eqs. (120,121) θ_3 .

Find angle difference $\Delta\varphi_1 = \varphi_3 - \varphi_1$:

$$\cos(\Delta\varphi_1) = \frac{1}{2} \frac{k_3^2(\theta_3) \sin^2(\theta_3) + k_1^2 \sin^2(\theta_1) - k_2^2(\theta_2) \sin^2(\theta_2)}{k_1 k_3(\theta_3) \sin(\theta_1) \sin(\theta_3)}. \quad (122)$$

Then, calculate $\varphi_1 = \varphi_3 - \Delta\varphi_1$. Next, find angle difference $\Delta\varphi_2 = \varphi_2 - \varphi_3$:

$$\cos(\Delta\varphi_2) = \frac{1}{2} \frac{k_3^2(\theta_3) \sin^2(\theta_3) + k_2^2(\theta_2) \sin^2(\theta_2) - k_1^2 \sin^2(\theta_1)}{k_2(\theta_2) k_3(\theta_3) \sin(\theta_2) \sin(\theta_3)}. \quad (123)$$

Then, calculate $\varphi_2 = \varphi_3 + \Delta\varphi_2$.

Type eeo

Find angle θ_2 numerically from

$$k_3^2 - (k_1^2(\theta_1) + k_2^2(\theta_2) + 2k_1(\theta_1)k_2(\theta_2) \cos(\alpha)) = 0, \quad (124)$$

where $k_1(\theta_1) = \frac{n^{(e)}(\lambda_1, \theta_1)}{\lambda_1}$ and $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$ are known and $k_2(\theta_2) = \frac{n^{(e)}(\lambda_2, \theta_2)}{\lambda_2}$. See Eq. (22) for $n^{(e)}(\lambda_{1,2}, \theta_{1,2})$. Then, find pump wave angle θ_3 from

$$\theta_3 = \arccos \left(\frac{k_1(\theta_1) \cos(\theta_1) + k_2(\theta_2) \cos(\theta_2)}{k_3} \right). \quad (125)$$

Find angle difference $\Delta\varphi_1 = \varphi_3 - \varphi_1$:

$$\cos(\Delta\varphi_1) = \frac{1}{2} \frac{k_3^2 \sin^2(\theta_3) + k_1^2(\theta_1) \sin^2(\theta_1) - k_2^2(\theta_2) \sin^2(\theta_2)}{k_1(\theta_1) k_3 \sin(\theta_1) \sin(\theta_3)}. \quad (126)$$

Then, calculate $\varphi_1 = \varphi_3 - \Delta\varphi_1$. Next, find angle difference $\Delta\varphi_2 = \varphi_2 - \varphi_3$:

$$\cos(\Delta\varphi_2) = \frac{1}{2} \frac{k_3^2 \sin^2(\theta_3) + k_2^2(\theta_2) \sin^2(\theta_2) - k_1^2(\theta_1) \sin^2(\theta_1)}{k_2(\theta_2) k_3 \sin(\theta_2) \sin(\theta_3)}. \quad (127)$$

Then, calculate $\varphi_2 = \varphi_3 + \Delta\varphi_2$.

Type eoo

Here, we should check if $\cos(\alpha)$ and $\cos(\alpha_{12})$, calculated from

$$\cos(\alpha_{12}) = -\frac{k_1^2(\theta_1) + k_2^2 - k_3^2}{2k_1(\theta_1)k_2} \quad (128)$$

coincide. If yes, then we continue the calculations. Here, $k_1(\theta_1) = \frac{n^{(e)}(\lambda_1, \theta_1)}{\lambda_1}$, $k_2 = \frac{n_o(\lambda_2)}{\lambda_2}$ and $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$. See Eq. (25) for $n^{(e)}(\lambda_1, \theta_1)$.

Then, find pump wave angle θ_3 by solving numerically equation:

$$\cos(\varphi_1 - \varphi_2) - C_{12}(\theta_3) = 0, \quad (129)$$

where φ_1 and φ_2 are found from

$$\cos(\varphi_3 - \varphi_1) = \frac{1}{2} \frac{k_3^2 \sin^2(\theta_3) + k_1^2(\theta_1) \sin^2(\theta_1) - k_2^2 \sin^2(\theta_{2x}(\theta_3))}{k_1(\theta_1)k_3 \sin(\theta_1) \sin(\theta_3)}, \quad (130)$$

$$\cos(\varphi_3 - \varphi_2) = \frac{1}{2} \frac{k_3^2 \sin^2(\theta_3) + k_2^2 \sin^2(\theta_{2x}(\theta_3)) - k_1^2(\theta_1) \sin^2(\theta_1)}{k_2k_3 \sin(\theta_{2x}(\theta_3)) \sin(\theta_3)} \quad (131)$$

and $C_{12}(\theta_3)$ is found from

$$C_{12}(\theta_3) = \cos(\varphi_{12}) = -\frac{1}{2} \frac{k_2^2 \sin^2(\theta_{2x}(\theta_3)) + k_1^2(\theta_1) \sin^2(\theta_1) - k_3^2 \sin^2(\theta_3)}{k_1(\theta_1)k_2 \sin(\theta_1) \sin(\theta_{2x}(\theta_3))}. \quad (132)$$

Once the angle θ_3 is found, calculate θ_2 from

$$\theta_2 = \arccos \left(\frac{k_3 \cos(\theta_3) - k_1(\theta_1) \cos(\theta_1)}{k_2} \right). \quad (133)$$

From Eqs. (130) and (131) estimate φ_1 and φ_2 .

Type oeo

Find angle θ_2 numerically from

$$k_3^2 - (k_1^2 + k_2^2(\theta_2) + 2k_1k_2(\theta_2) \cos(\alpha)) = 0, \quad (134)$$

where $k_1 = \frac{n_o(\lambda_1)}{\lambda_1}$ and $k_3 = \frac{n_o(\lambda_3)}{\lambda_3}$ are known and $k_2(\theta_2) = \frac{n^{(e)}(\lambda_2, \theta_2)}{\lambda_2}$. See Eq. (28) for $n^{(e)}(\lambda_2, \theta_2)$. Then, find pump wave angle θ_3 from

$$\theta_3 = \arccos \left(\frac{k_1 \cos(\theta_1) + k_2(\theta_2) \cos(\theta_2)}{k_3} \right). \quad (135)$$

Find angle difference $\Delta\varphi_1 = \varphi_3 - \varphi_1$:

$$\cos(\Delta\varphi_1) = \frac{1}{2} \frac{k_3^2 \sin^2(\theta_3) + k_1^2 \sin^2(\theta_1) - k_2^2(\theta_2) \sin^2(\theta_2)}{k_1k_3 \sin(\theta_1) \sin(\theta_3)}. \quad (136)$$

Then, calculate $\varphi_1 = \varphi_3 - \Delta\varphi_1$. Next, find angle difference $\Delta\varphi_2 = \varphi_2 - \varphi_3$:

$$\cos(\Delta\varphi_2) = \frac{1}{2} \frac{k_2^2 \sin^2(\theta_2) + k_2^2(\theta_2) \sin^2(\theta_2) - k_1^2 \sin^2(\theta_1)}{k_2(\theta_2)k_3 \sin(\theta_2) \sin(\theta_3)}. \quad (137)$$

Then, calculate $\varphi_2 = \varphi_3 + \Delta\varphi_2$.

Biaxial crystal. Collinear phase-matching

Equations (65)–(82) are utilized to calculate the collinear phase-matching in biaxial crystal.

Biaxial crystal. Noncollinear phase-matching

In the case of up-conversion in the biaxial crystal, only the tilt angle $\alpha = \theta_{p2} - \theta_{p1}$ between the pump 1 and pump 2 waves is taken. In different planes, the angle θ_p is treated as follows:

- **XY plane.** θ_p is the Euler angle φ .
- **XZ plane.** θ_p is the Euler angle θ .
- **YZ plane.** θ_p is the Euler angle θ .

Goal: calculate phase-matching angles θ_{p1} , θ_{p2} and θ_{p3} for signal, idler and pump waves, respectively. Then, convert them to the propagation angles by the following rule:

- **XY plane.** $\theta_{1,2,3} = \frac{\pi}{2}$, $\varphi_{1,2,3} = \theta_{p1,2,3}$.
- **XZ plane.** $\theta_{1,2,3} = \theta_{p1,2,3}$, $\varphi_{1,2,3} = 0$.
- **YZ plane.** $\theta_{1,2,3} = \theta_{p1,2,3}$, $\varphi_{1,2,3} = \frac{\pi}{2}$.

For three different planes, we label the refractive indices $n_o(\lambda)$, $n_e(\lambda)$ and $n_p(\lambda)$ as follows:

- **XY plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_x(\lambda)$, $n_p(\lambda) = n_z(\lambda)$.
- **XZ plane.** $n_o(\lambda) = n_x(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_y(\lambda)$.
- **YZ plane.** $n_o(\lambda) = n_y(\lambda)$, $n_e(\lambda) = n_z(\lambda)$, $n_p(\lambda) = n_x(\lambda)$.

To make the notations shorter, we write n_{e1} instead of $n_e(\lambda_1)$ and so on.

Type oee

First, calculate $k_3(\theta_{p3})$ from

$$k_3(\theta_{p3}) = (k_1^2 + k_2^2 + 2k_1k_2 \cos(\alpha))^{1/2}, \quad (138)$$

where k_1 and k_2 are calculated from Eq. (66). Then, find θ_{p3} from

$$\cos^2(\theta_3) = \frac{1/n_3^{(e)2} - 1/n_{e3}^2}{1/n_{o3}^2 - 1/n_{e3}^2}, \quad (139)$$

where $n_3^{(e)} = k_3(\theta_{p3})\lambda_3$.

Next, note $x = \cos(\theta_{p1})$ and solve quadratic equation:

$$ax^2 + bx + c = 0, \quad (140)$$

where

$$a = k_3^2(\theta_{p3}), \quad (141)$$

$$b = -2k_3(\theta_{p3}) \cos(\theta_{p3})(k_1 + k_2 \cos(\alpha)), \quad (142)$$

$$c = k_3^2(\theta_{p3}) \cos^2(\theta_{p3}) - k_2^2 \sin^2(\alpha). \quad (143)$$

We take solution of Eq. (140):

$$\cos(\theta_{p1}) = \frac{-b + \sqrt{b^2 - 4ac}}{2a} \quad (144)$$

calculate θ_{p1} and then, θ_{p2} :

$$\theta_{p2} = \theta_{p1} + \alpha. \quad (145)$$

Type oee

First, find θ_{p2} solving numerically the equation:

$$k_2(\theta_{p2}) \cos(\theta_{p2}) - [k_3(\theta_{p3}) \cos(\theta_{p3}) - k_1 \cos(\theta_{p2} - \alpha)] = 0, \quad (146)$$

where $k_1 = n_p(\lambda_1)/\lambda_1$,

$$k_2(\theta_{p2}) = \frac{n_2^{(e)}}{\lambda_2}, \quad (147)$$

$$n_2^{(e)} = \frac{1}{(\cos^2(\theta_{p2})/n_{o2}^2 + \sin^2(\theta_{p2})/n_{e2}^2)^{1/2}}, \quad (148)$$

$$k_3(\theta_{p3}) = (k_1^2 + k_2^2(\theta_{p2}) + 2k_1k_2(\theta_{p2})\cos(\alpha))^{1/2} \quad (149)$$

and θ_{p3} is a function of θ_{p2} :

$$\cos^2(\theta_{p3}) = \frac{1/(\lambda_3 k_3(\theta_{p3}))^2 - 1/n_{e3}^2}{1/n_{o3}^2 - 1/n_{e3}^2}. \quad (150)$$

Calculate θ_{p2} , then express θ_{p3} from Eq. (150). Finally, find θ_{p1} :

$$\theta_{p1} = \theta_{p2} - \alpha. \quad (151)$$

Type eoe

First, find θ_{p1} solving numerically the equation:

$$k_1(\theta_{p1}) \cos(\theta_{p1}) - [k_3(\theta_{p3}) \cos(\theta_{p3}) - k_2 \cos(\theta_{p1} + \alpha)] = 0, \quad (152)$$

where $k_2 = n_p(\lambda_2)/\lambda_2$,

$$k_1(\theta_{p1}) = \frac{n_1^{(e)}}{\lambda_1},$$

$$n_1^{(e)} = (\cos^2(\theta_{p1})/n_{o1}^2 + \sin^2(\theta_{p1})/n_{e1}^2)^{-1/2},$$

$$k_3(\theta_{p3}) = (k_1^2(\theta_{p1}) + k_2^2 + 2k_1(\theta_{p1})k_2 \cos(\alpha))^{1/2}$$

and θ_{p3} is a function of θ_{p1} :

$$\cos^2(\theta_{p3}) = \frac{1/(\lambda_3 k_3(\theta_{p3}))^2 - 1/n_{e3}^2}{1/n_{o3}^2 - 1/n_{e3}^2}. \quad (156)$$

Calculate θ_{p1} , then express θ_{p3} from Eq. (156). Finally, find θ_{p2} :

$$\theta_{p2} = \theta_{p1} + \alpha. \quad (157)$$

Type eeo

First, find θ_{p1} solving numerically the equation:

$$k_3^2 - [k_1^2(\theta_{p1}) + k_2^2(\theta_{p1} + \alpha) + 2k_1(\theta_{p1})k_2(\theta_{p1} + \alpha)\cos(\alpha)] = 0, \quad (158)$$

where

$$k_1(\theta_{p1}) = \frac{n_1^{(e)}}{\lambda_1}, \quad (159)$$

$$n_1^{(e)} = (\cos^2(\theta_{p1})/n_{o1}^2 + \sin^2(\theta_{p1})/n_{e1}^2)^{-1/2} \quad (160)$$

and

$$k_2(\theta_{p2}) = \frac{n_2^{(e)}}{\lambda_2}, \quad (161)$$

$$n_2^{(e)} = (\cos^2(\theta_{p1} + \alpha)/n_{o2}^2 + \sin^2(\theta_{p1} + \alpha)/n_{e2}^2)^{-1/2} \quad (162)$$

(153) Find θ_{p1} , then calculate $\theta_{p2} = \theta_{p1} + \alpha$. Finally, find θ_{p3} :

$$\theta_{p3} = \arccos \left(\frac{k_1(\theta_{p1}) \cos(\theta_{p1}) + k_2(\theta_{p2}) \cos(\theta_{p2})}{k_3} \right), \quad (163)$$

(155) where $k_3 = n_p(\lambda_3)/\lambda_3$.

Type eoo

First, find θ_{p1} solving numerically the equation:

$$k_3^2 - [k_1^2(\theta_{p1}) + k_2^2 + 2k_1(\theta_{p1})k_2] = 0, \quad (164)$$

where $k_2 = n_p(\lambda_2)/\lambda_2$, $k_3 = n_p(\lambda_3)/\lambda_3$,

$$k_1(\theta_{p1}) = \frac{n_1^{(e)}}{\lambda_1}, \quad (165)$$

$$n_1^{(e)} = (\cos^2(\theta_{p1})/n_{o1}^2 + \sin^2(\theta_{p1})/n_{e1}^2)^{-1/2}, \quad (166)$$

Find θ_{p1} , then calculate $\theta_{p2} = \theta_{p1} + \alpha$. Finally, find θ_{p3} :

$$\theta_{p3} = \arccos \left(\frac{k_1(\theta_{p1}) \cos(\theta_{p1}) + k_2 \cos(\theta_{p2})}{k_3} \right). \quad (167)$$

Type oeo

First, find θ_{p1} solving numerically the equation:

$$k_3^2 - [k_1^2 + k_2^2(\theta_{p1} + \alpha) + 2k_1k_2(\theta_{p1} + \alpha)] = 0, \quad (168)$$

where $k_1 = n_p(\lambda_1)/\lambda_1$, $k_3 = n_p(\lambda_3)/\lambda_3$,

$$k_2(\theta_{p2}) = \frac{n_2^{(e)}}{\lambda_2}, \quad (169)$$

$$n_2^{(e)} = (\cos^2(\theta_{p2})/n_{o2}^2 + \sin^2(\theta_{p2})/n_{e2}^2)^{-1/2}, \quad (170)$$

Find θ_{p1} , then calculate $\theta_{p2} = \theta_{p1} + \alpha$. Finally, find θ_{p3} :

$$\theta_{p3} = \arccos \left(\frac{k_1 \cos(\theta_{p1}) + k_2(\theta_{p2}) \cos(\theta_{p2})}{k_3} \right). \quad (171)$$

4.3 PP crystals.

4.3.1 Equations

Main equations:

$$\frac{n_3(T)}{\lambda_3} - \frac{n_1(T)}{\lambda_1} - \frac{n_2(T)}{\lambda_2} = \frac{1}{\Lambda} \quad (172)$$

and

$$\frac{1}{\lambda_3} = \frac{1}{\lambda_1} + \frac{1}{\lambda_2}. \quad (173)$$

4.3.2 Notations. Down-conversion

- Indices 1,2,3 stand for signal, idler and pump waves, respectively.
- Λ is the grating period.
- $n_o(\lambda, T)$ and $n_e(\lambda, T)$ are the temperature-dependent principle refractive indices of the uniaxial crystal.
- $n_x(\lambda, T)$, $n_y(\lambda, T)$ and $n_z(\lambda, T)$ are the temperature-dependent principle refractive indices of the biaxial crystal.
- The meaning of $n_1(T)$, $n_2(T)$ and $n_3(T)$ in Eq. (172) depends on the interaction type.

4.3.3 Quasi-phasematching. Down-conversion

- Temperature T and pump wavelength λ_3 are given.
- From (172) and (173) equations one calculates either λ_1 when Λ is given or Λ when λ_1 is provided.
- From (172) and (173) equations one also calculates $\lambda_1(T)$ dependence when Λ is given.

4.3.4 Notations. Up-conversion

- Indices 1,2,3 stand for pump 1, pump 2 and sum frequency waves, respectively.
- Λ is the grating period.
- $n_o(\lambda, T)$ and $n_e(\lambda, T)$ are the temperature-dependent principle refractive indices of the uniaxial crystal.
- $n_x(\lambda, T)$, $n_y(\lambda, T)$ and $n_z(\lambda, T)$ are the temperature-dependent principle refractive indices of the biaxial crystal.
- The meaning of $n_1(T)$, $n_2(T)$ and $n_3(T)$ in Eq. (172) depends on the interaction type.

4.3.5 Quasi-phasematching. Up-conversion

- Temperature $T = 300$ K.
- Pump wavelengths λ_1 and λ_2 are given.
- From (172) and (173) equations one calculates Λ and λ_3 .
- Fixing λ_1 and varying λ_2 one calculates Λ for each λ_3 . As a result, $\lambda_3(\Lambda)$ dependence is obtained.

4.3.6 Interaction types

Uniaxial crystals

- **Type eee.** $n_1(T) = n_e(\lambda_1, T)$, $n_2(T) = n_e(\lambda_2, T)$, $n_3(T) = n_e(\lambda_3, T)$.
- **Type ooe.** $n_1(T) = n_o(\lambda_1, T)$, $n_2(T) = n_o(\lambda_2, T)$, $n_3(T) = n_e(\lambda_3, T)$.
- **Type oeo.** $n_1(T) = n_o(\lambda_1, T)$, $n_2(T) = n_e(\lambda_2, T)$, $n_3(T) = n_o(\lambda_3, T)$.
- **Type eoo.** $n_1(T) = n_e(\lambda_1, T)$, $n_2(T) = n_o(\lambda_2, T)$, $n_3(T) = n_o(\lambda_3, T)$.

Biaxial crystals

- **Type ZZZ.** $n_1(T) = n_z(\lambda_1, T)$, $n_2(T) = n_z(\lambda_2, T)$, $n_3(T) = n_z(\lambda_3, T)$.
- **Type YZY.** $n_1(T) = n_y(\lambda_1, T)$, $n_2(T) = n_z(\lambda_2, T)$, $n_3(T) = n_y(\lambda_3, T)$.
- **Type YYZ.** $n_1(T) = n_y(\lambda_1, T)$, $n_2(T) = n_y(\lambda_2, T)$, $n_3(T) = n_z(\lambda_3, T)$.
- **Type XZX.** $n_1(T) = n_x(\lambda_1, T)$, $n_2(T) = n_z(\lambda_2, T)$, $n_3(T) = n_x(\lambda_3, T)$.
- **Type XXZ.** $n_1(T) = n_x(\lambda_1, T)$, $n_2(T) = n_x(\lambda_2, T)$, $n_3(T) = n_z(\lambda_3, T)$.

4.4 Dispersion parameters

c/v: refractive index n

- Sellmeier equations from [1] were utilised.
- The refractive index n formulas for any type of interaction are given in Section 4.1.2.

c/u: fraction of speed of light to the group velocity

$$\frac{c}{u} = c \frac{dk}{d\omega}, \quad k = \frac{2\pi n}{\lambda}, \quad \lambda = \frac{2\pi c}{\omega}. \quad (174)$$

GVD: group velocity dispersion coefficient g

$$g = \frac{d^2 k}{d\omega^2}, \quad k = \frac{2\pi n}{\lambda}, \quad \lambda = \frac{2\pi c}{\omega}. \quad (175)$$

walk-off: the walk of angle β (for Bulk Crystals Down-conversion only).
For extraordinary wave:

$$\beta = \arctan \left(\frac{\tan(\theta_p)(n_o^2 - n_e^2)}{n_e^2 + n_o^2 \tan^2(\theta_p)} \right). \quad (176)$$

- uniaxial crystal: θ_p is the Euler angle θ .
- biaxial crystal: in XY plane θ_p is the Euler angle φ . In XZ and YZ planes θ_p is the Euler angle θ .

For ordinary wave:

$$\beta = 0. \quad (177)$$

d_{eff}: the effective nonlinear susceptibility (for Bulk Crystals only).
For each crystal, the formulas were taken from [1].

5 Edit crystals' database

- Click *Edit Database* in either *Bulk Crystals* or *PP Crystals* module, see Figs. 2 and 3, respectively.
- The menu window will be opened, Fig. 48
- Button *GO Back* returns to the previous window.
- Button *Reset DB* resets the database. All user-defined crystal are removed, only crystals from the main list remain. Crystals' main list is described in this tutorial. After clicking *Reset DB* button you will be asked one more time if you are sure to do this. It is recommended to restart the program after the reset of the database.

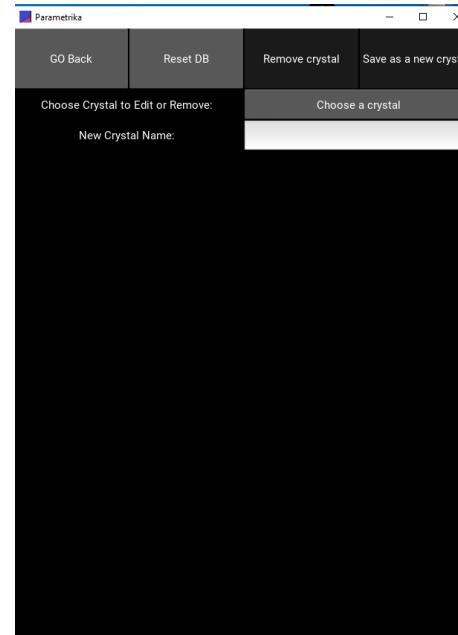


Figure 48: *Edit Database* menu window.

5 EDIT CRYSTALS' DATABASE

- The user is allowed to put in a new crystal on the base of an existing crystal.
- Choose a crystal to edit or remove from the list by clicking *Choose crystal*, Fig. 49.

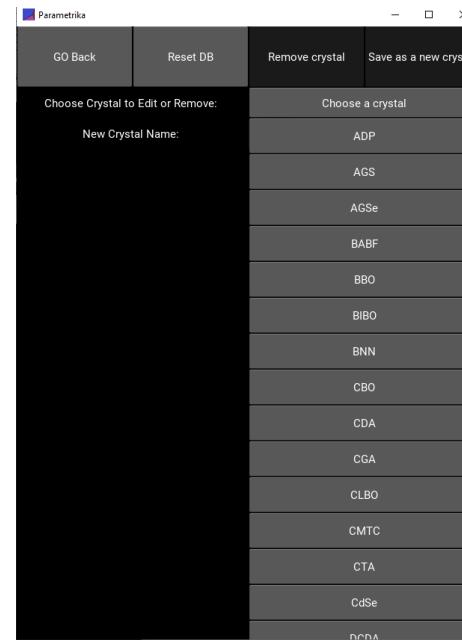


Figure 49: Crystals list drop-down menu. *Bulk crystals* module.

5 EDIT CRYSTALS' DATABASE

- Let's choose *BBO* crystal. Items to edit will appear, Fig. 50.
- One may choose a new crystal name. If one chooses an existing name, no changes will be applied.
- λ_{l1} and λ_{l2} are the limit wavelengths in the transparency range.
- Formulas for refractive index and other items are written in Python language. Use *np.sin(*)* and *np.cos(*)* for $\sin(*)$ and $\cos(*)$ functions. Use a^{**n} for power formula a^n .
- In the formulas, *theta* and *phi* denote the Euler angles θ, φ .
- In the module *PP Crystals*, refractive indices of uniaxial crystals depend both on wavelength λ and temperature T . For biaxial crystals, refractive index formula is given at $T = 300$ K and the formulas for the derivatives dn/dT should be provided.
- Press *Save as a new crystal* button to save the edited crystal. Note, that uniaxial crystal will remain uniaxial and biaxial crystal will be biaxial.
- Press button *Remove crystal* to remove a crystal. The crystals from the main list cannot be deleted.

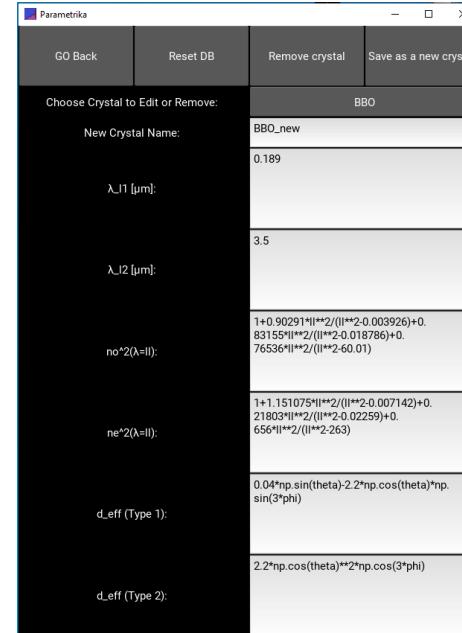


Figure 50: Crystal to edit: *BBO*. *Bulk crystals* module.

6 FINANCIAL SUPPORT

6 Financial Support

This work has received funding from European Regional Development Fund (Project No. 01.2.2-LMT-K-718-03-0004) under grant agreement with the Research Council of Lithuania (LMTLT).

Bibliography

- [1] D. N. Nikogosyan, Nonlinear optical crystals: a complete survey, Springer (2005).
- [2] Y. Zhou, Y. Yue, J. Wang, F. Yang, X. Cheng, D. Cui, Q. Peng, Z. Hu, Z. Xu, Nonlinear optical properties of BaAlBO₃F₂ crystal, Optics Express, 17, p. 20033-20038 (2009).
- [3] G. Tamošauskas. G. Beresnevičius, D. Gadonas and A. Dubietis, Transmittance and phase matching of BBO crystal in the 3-5 μm range and its application for the characterization of mid-infrared laser pulses, Optical Material Express, 8, p. 1410-1418 (2018).
- [4] W. R. Cook Jr., L. M. Hubby Jr., Indices of refraction of potassium pentaborate, J. Opt. Soc. Am., 11, p. 72-73 (1976) .
- [5] <https://www.ascut-bridge.de/products/nir-ir-non-linear-crystals/22-lgs-ligas2>
- [6] J.-J Zondy, V. Petrov, A. Yelisseyev, L. Isaenko and S. Lobanov, Orthorhombic crystals of lithium thioindate and selenoindate for nonlinear optics in the mid IR, Chapter Mid Infrared Coherent Sources and Applications, Part of the series NATO Science for Peace and Security Series B: Physics and Biophysics, p. 67-104, Springer (2008).